

EC-Council

Exam Questions 312-50v13

Certified Ethical Hacker v13



NEW QUESTION 1

- (Topic 1)

Under what conditions does a secondary name server request a zone transfer from a primary name server?

- A. When a primary SOA is higher than a secondary SOA
- B. When a secondary SOA is higher than a primary SOA
- C. When a primary name server has had its service restarted
- D. When a secondary name server has had its service restarted
- E. When the TTL falls to zero

Answer: A

NEW QUESTION 2

- (Topic 1)

Let's imagine three companies (A, B and C), all competing in a challenging global environment. Company A and B are working together in developing a product that will generate a major competitive advantage for them. Company A has a secure DNS server while company B has a DNS server vulnerable to spoofing. With a spoofing attack on the DNS server of company B, company C gains access to outgoing e-mails from company B. How do you prevent DNS spoofing?

- A. Install DNS logger and track vulnerable packets
- B. Disable DNS timeouts
- C. Install DNS Anti-spoofing
- D. Disable DNS Zone Transfer

Answer: C

NEW QUESTION 3

- (Topic 1)

Which DNS resource record can indicate how long any "DNS poisoning" could last?

- A. MX
- B. SOA
- C. NS
- D. TIMEOUT

Answer: B

NEW QUESTION 4

- (Topic 1)

Bob is acknowledged as a hacker of repute and is popular among visitors of "underground" sites.

Bob is willing to share his knowledge with those who are willing to learn, and many have expressed their interest in learning from him. However, this knowledge has a risk associated with it, as it can be used for malevolent attacks as well.

In this context, what would be the most effective method to bridge the knowledge gap between the "black" hats or crackers and the "white" hats or computer security professionals? (Choose the best answer.)

- A. Educate everyone with books, articles and training on risk analysis, vulnerabilities and safeguards.
- B. Hire more computer security monitoring personnel to monitor computer systems and networks.
- C. Make obtaining either a computer security certification or accreditation easier to achieve so more individuals feel that they are a part of something larger than life.
- D. Train more National Guard and reservists in the art of computer security to help out in times of emergency or crises.

Answer: A

NEW QUESTION 5

- (Topic 1)

Study the snort rule given below:

```

alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|ob|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)

```

```

alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4, depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|ob|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)

```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 6

- (Topic 1)

You are a Network Security Officer. You have two machines. The first machine (192.168.0.99) has snort installed, and the second machine (192.168.0.150) has kiwi syslog installed. You perform a syn scan in your network, and you notice that kiwi syslog is not receiving the alert message from snort. You decide to run wireshark in the snort machine to check if the messages are going to the kiwi syslog machine. What Wireshark filter will show the connections from the snort machine to kiwi syslog machine?

- A. tcp.srcport= 514 && ip.src= 192.168.0.99
- B. tcp.srcport= 514 && ip.src= 192.168.150
- C. tcp.dstport= 514 && ip.dst= 192.168.0.99
- D. tcp.dstport= 514 && ip.dst= 192.168.0.150

Answer: D

NEW QUESTION 7

- (Topic 1)

Which of the following tools can be used to perform a zone transfer?

- A. NSLookup
- B. Finger
- C. Dig
- D. Sam Spade
- E. Host
- F. Netcat
- G. Neotrace

Answer: ACDE

NEW QUESTION 8

- (Topic 1)

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

Answer: C

Explanation:

https://en.wikipedia.org/wiki/Internet_Relay_Chat

Internet Relay Chat (IRC) is an application layer protocol that facilitates communication in text. The chat process works on a client/server networking model. IRC clients are computer programs that users can install on their system or web-based applications running either locally in the browser or on a third-party server. These clients communicate with chat servers to transfer messages to other clients.

IRC is a plaintext protocol that is officially assigned port 194, according to IANA. However, running the service on this port requires running it with root-level

permissions, which is inadvisable. As a result, the well-known port for IRC is 6667, a high-number port that does not require elevated privileges. However, an IRC server can also be configured to run on other ports as well.

You can't tell if an IRC server is designed to be malicious solely based on port number. Still, if you see an IRC server running on port a WKP such as 80, 8080, 53, 443, it's almost always going to be malicious; the only real reason for IRCD to be running on port 80 is to try to evade firewalls.

https://en.wikipedia.org/wiki/Application_firewall

An application firewall is a form of firewall that controls input/output or system calls of an application or service. It operates by monitoring and blocking communications based on a configured policy, generally with predefined rule sets to choose from. The application firewall can control communications up to the OSI model's application layer, which is the highest operating layer, and where it gets its name. The two primary categories of application firewalls are network-based and host-based.

Application layer filtering operates at a higher level than traditional security appliances. This allows packet decisions to be made based on more than just source/destination IP Addresses or ports. It can also use information spanning across multiple connections for any given host.

Network-based application firewalls

Network-based application firewalls operate at the application layer of a TCP/IP stack. They can understand certain applications and protocols such as File Transfer Protocol (FTP), Domain Name System (DNS), or Hypertext Transfer Protocol (HTTP). This allows it to identify unwanted applications or services using a non-standard port or detect if an allowed protocol is being abused.

Host-based application firewalls

A host-based application firewall monitors application system calls or other general system communication. This gives more granularity and control but is limited to only protecting the host it is running on. Control is applied by filtering on a per-process basis. Generally, prompts are used to define rules for processes that have not yet received a connection. Further filtering can be done by examining the process ID of the owner of the data packets. Many host-based application firewalls are combined or used in conjunction with a packet filter.

NEW QUESTION 9

- (Topic 1)

What is the proper response for a NULL scan if the port is closed?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: E

NEW QUESTION 10

- (Topic 1)

Bob is doing a password assessment for one of his clients. Bob suspects that security policies are not in place. He also suspects that weak passwords are probably the norm throughout the company he is evaluating. Bob is familiar with password weaknesses and key loggers.

Which of the following options best represents the means that Bob can adopt to retrieve passwords from his clients hosts and servers?

- A. Hardware, Software, and Sniffing.
- B. Hardware and Software Keyloggers.
- C. Passwords are always best obtained using Hardware key loggers.
- D. Software only, they are the most effective.

Answer: A

NEW QUESTION 10

- (Topic 1)

Bob, a system administrator at TPNQM SA, concluded one day that a DMZ is not needed if he properly configures the firewall to allow access just to servers/ports, which can have direct internet access, and block the access to workstations.

Bob also concluded that DMZ makes sense just when a stateful firewall is available, which is not the case of TPNQM SA.

In this context, what can you say?

- A. Bob can be right since DMZ does not make sense when combined with stateless firewalls
- B. Bob is partially right
- C. He does not need to separate networks if he can create rules by destination IPs, one by one
- D. Bob is totally wrong
- E. DMZ is always relevant when the company has internet servers and workstations
- F. Bob is partially right
- G. DMZ does not make sense when a stateless firewall is available

Answer: C

NEW QUESTION 12

- (Topic 1)

You are the Network Admin, and you get a complaint that some of the websites are no longer accessible. You try to ping the servers and find them to be reachable. Then you type the IP address and then you try on the browser, and find it to be accessible. But they are not accessible when you try using the URL. What may be the problem?

- A. Traffic is Blocked on UDP Port 53
- B. Traffic is Blocked on TCP Port 80
- C. Traffic is Blocked on TCP Port 54
- D. Traffic is Blocked on UDP Port 80

Answer: A

Explanation:

Most likely have an issue with DNS.

DNS stands for Domain Name System. It's a system that lets you connect to websites by matching human-readable domain names (like example.com) with the server's unique ID where a website is stored. Think of the DNS system as the internet's phonebook. It lists domain names with their corresponding identifiers called IP addresses, instead of listing people's names with their phone numbers. When a user enters a domain name like wpbeginner.com on their device, it looks up the IP address and connects them to the physical location where that website is stored.

NOTE: Often DNS lookup information will be cached locally inside the querying computer or remotely in the DNS infrastructure. There are typically 8 steps in a DNS lookup. When DNS information is cached, steps are skipped from the DNS lookup process, making it quicker. The example below outlines all 8 steps when nothing is cached.

The 8 steps in a DNS lookup:

- * 1. A user types example.com into a web browser, and the query travels into the Internet and is received by a DNS recursive resolver;
- * 2. The resolver then queries a DNS root nameserver;
- * 3. The root server then responds to the resolver with the address of a Top-Level Domain (TLD) DNS server (such as .com or .net), which stores the information for its domains. When searching for example.com, our request is pointed toward the .com TLD;
- * 4. The resolver then requests the .com TLD;
- * 5. The TLD server then responds with the IP address of the domain's nameserver, example.com;
- * 6. Lastly, the recursive resolver sends a query to the domain's nameserver;
- * 7. The IP address for example.com is then returned to the resolver from the nameserver;
- * 8. The DNS resolver then responds to the web browser with the IP address of the domain requested initially;

Once the 8 steps of the DNS lookup have returned the IP address for example.com, the browser can request the web page:

- * 9. The browser makes an HTTP request to the IP address;
- * 10. The server at that IP returns the webpage to be rendered in the browser.

NOTE 2: DNS primarily uses the User Datagram Protocol (UDP) on port number 53 to serve requests. And if this port is blocked, then a problem arises already in the first step. But the ninth step is performed without problems.

NEW QUESTION 17

- (Topic 1)

Peter, a Network Administrator, has come to you looking for advice on a tool that would help him perform SNMP enquires over the network. Which of these tools would do the SNMP enumeration he is looking for? Select the best answers.

- A. SNMPUtil
- B. SNScan
- C. SNMPScan
- D. Solarwinds IP Network Browser
- E. NMap

Answer: ABD

NEW QUESTION 19

- (Topic 1)

The establishment of a TCP connection involves a negotiation called three-way handshake. What type of message does the client send to the server in order to begin this negotiation?

- A. ACK
- B. SYN
- C. RST
- D. SYN-ACK

Answer: B

NEW QUESTION 21

- (Topic 1)

Why would you consider sending an email to an address that you know does not exist within the company you are performing a Penetration Test for?

- A. To determine who is the holder of the root account
- B. To perform a DoS
- C. To create needless SPAM
- D. To illicit a response back that will reveal information about email servers and how they treat undeliverable mail
- E. To test for virus protection

Answer: D

NEW QUESTION 24

- (Topic 1)

You just set up a security system in your network. In what kind of system would you find the following string of characters used as a rule within its configuration? alert tcp any any -> 192.168.100.0/24 21 (msg: ???FTP on the network!???)

- A. A firewall IPTable
- B. FTP Server rule
- C. A Router IPTable
- D. An Intrusion Detection System

Answer: D

NEW QUESTION 25

- (Topic 1)

Which of the following tools are used for enumeration? (Choose three.)

- A. SolarWinds

- B. USER2SID
- C. Cheops
- D. SID2USER
- E. DumpSec

Answer: BDE

NEW QUESTION 30

- (Topic 1)

Eric has discovered a fantastic package of tools named Dsniff on the Internet. He has learnt to use these tools in his lab and is now ready for real world exploitation. He was able to effectively intercept communications between the two entities and establish credentials with both sides of the connections. The two remote ends of the communication never notice that Eric is relaying the information between the two. What would you call this attack?

- A. Interceptor
- B. Man-in-the-middle
- C. ARP Proxy
- D. Poisoning Attack

Answer: B

NEW QUESTION 33

- (Topic 1)

You are tasked to perform a penetration test. While you are performing information gathering, you find an employee list in Google. You find the receptionist's email, and you send her an email changing the source email to her boss's email (boss@company). In this email, you ask for a pdf with information. She reads your email and sends back a pdf with links. You exchange the pdf links with your malicious links (these links contain malware) and send back the modified pdf, saying that the links don't work. She reads your email, opens the links, and her machine gets infected. You now have access to the company network. What testing method did you use?

- A. Social engineering
- B. Piggybacking
- C. Tailgating
- D. Eavesdropping

Answer: A

Explanation:

Social engineering is the term used for a broad range of malicious activities accomplished through human interactions. It uses psychological manipulation to trick users into making security mistakes or giving away sensitive information.

Social engineering attacks typically involve some form of psychological manipulation, fooling otherwise unsuspecting users or employees into handing over confidential or sensitive data. Commonly, social engineering involves email or other communication that invokes urgency, fear, or similar emotions in the victim, leading the victim to promptly reveal sensitive information, click a malicious link, or open a malicious file. Because social engineering involves a human element, preventing these attacks can be tricky for enterprises.

NEW QUESTION 34

- (Topic 1)

Which of the following statements about a zone transfer is correct? (Choose three.)

- A. A zone transfer is accomplished with the DNS
- B. A zone transfer is accomplished with the nslookup service
- C. A zone transfer passes all zone information that a DNS server maintains
- D. A zone transfer passes all zone information that a nslookup server maintains
- E. A zone transfer can be prevented by blocking all inbound TCP port 53 connections
- F. Zone transfers cannot occur on the Internet

Answer: ACE

NEW QUESTION 37

- (Topic 1)

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 41

- (Topic 1)

The change of a hard drive failure is once every three years. The cost to buy a new hard drive is \$300. It will require 10 hours to restore the OS and software to the new hard disk. It will require a further 4 hours to restore the database from the last backup to the new hard disk. The recovery person earns \$10/hour. Calculate the SLE, ARO, and ALE. Assume the EF = 1(100%). What is the closest approximate cost of this replacement and recovery operation per year?

- A. \$1320
- B. \$440
- C. \$100
- D. \$146

Answer: D

Explanation:

1. AV (Asset value) = \$300 + (14 * \$10) = \$440 - the cost of a hard drive plus the work of a recovery person, i.e. how much would it take to replace 1 asset? 10 hours for resorting the OS and soft + 4 hours for DB restore multiplies by hourly rate of the recovery person.
- * 2. SLE (Single Loss Expectancy) = AV * EF (Exposure Factor) = \$440 * 1 = \$440
- * 3. ARO (Annual rate of occurrence) = 1/3 (every three years, meaning the probability of occurring during 1 year is 1/3)
- * 4. ALE (Annual Loss Expectancy) = SLE * ARO = 0.33 * \$440 = \$145.2

NEW QUESTION 42

- (Topic 1)

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTIC TLS
- B. UPGRADE TLS
- C. FORCE TLS
- D. START TLS

Answer: D

NEW QUESTION 45

- (Topic 1)

What tool can crack Windows SMB passwords simply by listening to network traffic?

- A. This is not possible
- B. Netbus
- C. NTFSDOS
- D. L0phtcrack

Answer: D

NEW QUESTION 50

- (Topic 1)

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

Answer: C

NEW QUESTION 53

- (Topic 1)

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 54

- (Topic 1)

User A is writing a sensitive email message to user B outside the local network. User A has chosen to use PKI to secure his message and ensure only user B can read the sensitive email. At what layer of the OSI layer does the encryption and decryption of the message take place?

- A. Application
- B. Transport
- C. Session
- D. Presentation

Answer: D

Explanation:

https://en.wikipedia.org/wiki/Presentation_layer

In the seven-layer OSI model of computer networking, the presentation layer is layer 6 and serves as the data translator for the network. It is sometimes called the syntax layer. The presentation layer is responsible for the formatting and delivery of information to the application layer for further processing or display. Encryption is typically done at this level too, although it can be done on the application, session, transport, or network layers, each having its own advantages and disadvantages. Decryption is also handled at the presentation layer. For example, when logging on to bank account sites the presentation layer will decrypt the data as it is received.

NEW QUESTION 56

- (Topic 1)

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 61

- (Topic 1)

Which of the following is assured by the use of a hash?

- A. Authentication
- B. Confidentiality
- C. Availability
- D. Integrity

Answer: D

NEW QUESTION 62

- (Topic 1)

Which of the following program infects the system boot sector and the executable files at the same time?

- A. Polymorphic virus
- B. Stealth virus
- C. Multipartite Virus
- D. Macro virus

Answer: C

NEW QUESTION 67

- (Topic 1)

Which results will be returned with the following Google search query? site:target.com – site:Marketing.target.com accounting

- A. Results from matches on the site marketing.target.com that are in the domain target.com but do not include the word accounting.
- B. Results matching all words in the query.
- C. Results for matches on target.com and Marketing.target.com that include the word ??accounting??
- D. Results matching ??accounting?? in domain target.com but not on the site Marketing.target.com

Answer: D

NEW QUESTION 70

- (Topic 1)

What is correct about digital signatures?

- A. A digital signature cannot be moved from one signed document to another because it is the hash of the original document encrypted with the private key of the signing party.
- B. Digital signatures may be used in different documents of the same type.
- C. A digital signature cannot be moved from one signed document to another because it is a plain hash of the document content.
- D. Digital signatures are issued once for each user and can be used everywhere until they expire.

Answer: A

NEW QUESTION 75

- (Topic 1)

Bob received this text message on his mobile phone: ??Hello, this is Scott Smelby from the Yahoo Bank. Kindly contact me for a vital transaction on: scottsmelby@yahoo.com??. Which statement below is true?

- A. This is a scam as everybody can get a @yahoo address, not the Yahoo customer service employees.
- B. This is a scam because Bob does not know Scott.
- C. Bob should write to scottmelby@yahoo.com to verify the identity of Scott.
- D. This is probably a legitimate message as it comes from a respectable organization.

Answer: A

NEW QUESTION 78

- (Topic 1)

You need to deploy a new web-based software package for your organization. The package requires three separate servers and needs to be available on the Internet. What is the recommended architecture in terms of server placement?

- A. All three servers need to be placed internally
- B. A web server facing the Internet, an application server on the internal network, a database server on the internal network
- C. A web server and the database server facing the Internet, an application server on the internal network

D. All three servers need to face the Internet so that they can communicate between themselves

Answer: B

NEW QUESTION 82

- (Topic 1)

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 87

- (Topic 1)

Which regulation defines security and privacy controls for Federal information systems and organizations?

- A. HIPAA
- B. EU Safe Harbor
- C. PCI-DSS
- D. NIST-800-53

Answer: D

Explanation:

NIST Special Publication 800-53 provides a catalog of security and privacy controls for all U.S. federal information systems except those related to national security. It is published by the National Institute of Standards and Technology, which is a non-regulatory agency of the United States Department of Commerce. NIST develops and issues standards, guidelines, and other publications to assist federal agencies in implementing the Federal Information Security Modernization Act of 2014 (FISMA) and to help with managing cost-effective programs to protect their information and information systems.

NEW QUESTION 89

- (Topic 1)

A large mobile telephony and data network operator has a data center that houses network elements. These are essentially large computers running on Linux. The perimeter of the data center is secured with firewalls and IPS systems.

What is the best security policy concerning this setup?

- A. Network elements must be hardened with user ids and strong password
- B. Regular security tests and audits should be performed.
- C. As long as the physical access to the network elements is restricted, there is no need for additional measures.
- D. There is no need for specific security measures on the network elements as long as firewalls and IPS systems exist.
- E. The operator knows that attacks and down time are inevitable and should have a backup site.

Answer: A

NEW QUESTION 90

- (Topic 1)

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

Answer: C

NEW QUESTION 95

- (Topic 1)

Why should the security analyst disable/remove unnecessary ISAPI filters?

- A. To defend against social engineering attacks
- B. To defend against webserver attacks
- C. To defend against jailbreaking
- D. To defend against wireless attacks

Answer: B

NEW QUESTION 96

- (Topic 1)

Susan has attached to her company's network. She has managed to synchronize her boss's sessions with that of the file server. She then intercepted his traffic destined for the server, changed it the way she wanted to and then placed it on the server in his home directory.

What kind of attack is Susan carrying on?

- A. A sniffing attack
- B. A spoofing attack

- C. A man in the middle attack
- D. A denial of service attack

Answer: C

NEW QUESTION 98

- (Topic 1)

The company ABC recently contracts a new accountant. The accountant will be working with the financial statements. Those financial statements need to be approved by the CFO and then they will be sent to the accountant but the CFO is worried because he wants to be sure that the information sent to the accountant was not modified once he approved it. Which of the following options can be useful to ensure the integrity of the data?

- A. The CFO can use a hash algorithm in the document once he approved the financial statements
- B. The CFO can use an excel file with a password
- C. The financial statements can be sent twice, one by email and the other delivered in USB and the accountant can compare both to be sure is the same document
- D. The document can be sent to the accountant using an exclusive USB for that document

Answer: A

NEW QUESTION 99

- (Topic 1)

Scenario1:

- * 1. Victim opens the attacker's web site.
 - * 2. Attacker sets up a web site which contains interesting and attractive content like 'Do you want to make \$1000 in a day?'
 - * 3. Victim clicks to the interesting and attractive content URL.
 - * 4. Attacker creates a transparent 'iframe' in front of the URL which victim attempts to click, so victim thinks that he/she clicks to the 'Do you want to make \$1000 in a day?' URL but actually he/she clicks to the content or URL that exists in the transparent 'iframe' which is setup by the attacker.
- What is the name of the attack which is mentioned in the scenario?

- A. Session Fixation
- B. HTML Injection
- C. HTTP Parameter Pollution
- D. Clickjacking Attack

Answer: D

Explanation:

<https://en.wikipedia.org/wiki/Clickjacking>

Clickjacking is an attack that tricks a user into clicking a webpage element which is invisible or disguised as another element. This can cause users to unwittingly download malware, visit malicious web pages, provide credentials or sensitive information, transfer money, or purchase products online.

Typically, clickjacking is performed by displaying an invisible page or HTML element, inside an iframe, on top of the page the user sees. The user believes they are clicking the visible page but in fact they are clicking an invisible element in the additional page transposed on top of it.

NEW QUESTION 101

- (Topic 1)

Your company performs penetration tests and security assessments for small and medium- sized business in the local area. During a routine security assessment, you discover information that suggests your client is involved with human trafficking.

What should you do?

- A. Confront the client in a respectful manner and ask her about the data.
- B. Copy the data to removable media and keep it in case you need it.
- C. Ignore the data and continue the assessment until completed as agreed.
- D. Immediately stop work and contact the proper legal authorities.

Answer: D

NEW QUESTION 106

- (Topic 1)

Which type of security feature stops vehicles from crashing through the doors of a building?

- A. Bollards
- B. Receptionist
- C. Mantrap
- D. Turnstile

Answer: A

NEW QUESTION 108

- (Topic 1)

When analyzing the IDS logs, the system administrator noticed an alert was logged when the external router was accessed from the administrator's Computer to update the router configuration. What type of an alert is this?

- A. False negative
- B. True negative
- C. True positive
- D. False positive

Answer: D

Explanation:

True Positive - IDS referring a behavior as an attack, in real life it is True Negative - IDS referring a behavior not an attack and in real life it is not False Positive - IDS referring a behavior as an attack, in real life it is not False Negative - IDS referring a behavior not an attack, but in real life is an attack. False Negative - is the most serious and dangerous state of all !!!!

NEW QUESTION 113

- (Topic 1)

Joseph was the Web site administrator for the Mason Insurance in New York, who's main Web site was located at www.masonins.com. Joseph uses his laptop computer regularly to administer the Web site. One night, Joseph received an urgent phone call from his friend, Smith. According to Smith, the main Mason Insurance web site had been vandalized! All of its normal content was removed and replaced with an attacker's message "Hacker Message: You are dead! Freaks!?? From his office, which was directly connected to Mason Insurance's internal network, Joseph surfed to the Web site using his laptop. In his browser, the Web site looked completely intact.

No changes were apparent. Joseph called a friend of his at his home to help troubleshoot the problem. The Web site appeared defaced when his friend visited using his DSL connection. So, while Smith and his friend could see the defaced page, Joseph saw the intact Mason Insurance web site. To help make sense of this problem, Joseph decided to access the Web site using his dial-up ISP. He disconnected his laptop from the corporate internal network and used his modem to dial up the same ISP used by Smith. After his modem connected, he quickly typed www.masonins.com in his browser to reveal the following web page:

```
H@cker Mess@ge:  
Y0u @re De@d! Fre@ks!
```

After seeing the defaced Web site, he disconnected his dial-up line, reconnected to the internal network, and used Secure Shell (SSH) to log in directly to the Web server. He ran Tripwire against the entire Web site, and determined that every system file and all the Web content on the server were intact. How did the attacker accomplish this hack?

- A. ARP spoofing
- B. SQL injection
- C. DNS poisoning
- D. Routing table injection

Answer: C

NEW QUESTION 115

- (Topic 1)

What is the following command used for? `net use \targetipc$ "" /u:""`

- A. Grabbing the etc/passwd file
- B. Grabbing the SAM
- C. Connecting to a Linux computer through Samba.
- D. This command is used to connect as a null session
- E. Enumeration of Cisco routers

Answer: D

NEW QUESTION 117

- (Topic 1)

Peter extracts the SIDs list from Windows 2000 Server machine using the hacking tool "SIDExtractor". Here is the output of the SIDs:

```
s-1-5-21-1125394485-807628933-54978560-100Johns  
s-1-5-21-1125394485-807628933-54978560-652Rebecca  
s-1-5-21-1125394485-807628933-54978560-412Sheela  
s-1-5-21-1125394485-807628933-54978560-999Shawn  
s-1-5-21-1125394485-807628933-54978560-777Somia  
s-1-5-21-1125394485-807628933-54978560-500chang  
s-1-5-21-1125394485-807628933-54978560-555Micah
```

From the above list identify the user account with System Administrator privileges.

- A. John
- B. Rebecca
- C. Sheela
- D. Shawn
- E. Somia
- F. Chang
- G. Micah

Answer: F

NEW QUESTION 120

- (Topic 1)

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus

- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

Explanation:

Tcpdump is a data-network packet analyzer computer program that runs under a command-line interface. It allows the user to display TCP/IP and other packets being transmitted or received over a network to which the computer is attached. Distributed under the BSD license, tcpdump is free software.

<https://www.wireshark.org/>

Wireshark is a free and open-source packet analyzer. It is used for network troubleshooting, analysis, software and communications protocol development, and education.

NOTE: Wireshark is very similar to tcpdump, but has a graphical front-end, plus some integrated sorting and filtering options.

NEW QUESTION 121

- (Topic 1)

What did the following commands determine?

```
C: user2sid \earth guest
S-1-5-21-343818398-789336058-1343024091-501
C:sid2user 5 21 343818398 789336058 1343024091 500
Name is Joe
Domain is EARTH
```

- A. That the Joe account has a SID of 500
- B. These commands demonstrate that the guest account has NOT been disabled
- C. These commands demonstrate that the guest account has been disabled
- D. That the true administrator is Joe
- E. Issued alone, these commands prove nothing

Answer: D

NEW QUESTION 125

- (Topic 1)

Null sessions are un-authenticated connections (not using a username or password.) to an NT or 2000 system. Which TCP and UDP ports must you filter to check null sessions on your network?

- A. 137 and 139
- B. 137 and 443
- C. 139 and 443
- D. 139 and 445

Answer: D

NEW QUESTION 128

- (Topic 1)

Which of the following is the BEST way to defend against network sniffing?

- A. Using encryption protocols to secure network communications
- B. Register all machines MAC Address in a Centralized Database
- C. Use Static IP Address
- D. Restrict Physical Access to Server Rooms hosting Critical Servers

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Sniffing_attack

To prevent networks from sniffing attacks, organizations and individual users should keep away from applications using insecure protocols, like basic HTTP authentication, File Transfer Protocol (FTP), and Telnet. Instead, secure protocols such as HTTPS, Secure File Transfer Protocol (SFTP), and Secure Shell (SSH) should be preferred. In case there is a necessity for using any insecure protocol in any application, all the data transmission should be encrypted. If required, VPN (Virtual Private Networks) can be used to provide secure access to users.

NOTE: I want to note that the wording "best option" is valid only for the EC-Council's exam since the other options will not help against sniffing or will only help from some specific attack vectors.

The sniffing attack surface is huge. To protect against it, you will need to implement a complex of measures at all levels of abstraction and apply controls at the physical, administrative, and technical levels. However, encryption is indeed the best option of all, even if your data is intercepted - an attacker cannot understand it.

NEW QUESTION 131

- (Topic 1)

Suppose your company has just passed a security risk assessment exercise. The results display that the risk of the breach in the main company application is 50%. Security staff has taken some measures and implemented the necessary controls. After that, another security risk assessment was performed showing that risk has decreased to 10%. The risk threshold for

the application is 20%. Which of the following risk decisions will be the best for the project in terms of its successful continuation with the most business profit?


- A. Accept the risk
- B. Introduce more controls to bring risk to 0%
- C. Mitigate the risk
- D. Avoid the risk

Answer: A

Explanation:

Risk Mitigation

Risk mitigation can be defined as taking steps to reduce adverse effects. There are four types of risk mitigation strategies that hold unique to Business Continuity and Disaster Recovery. When mitigating risk, it's important to develop a strategy that closely relates to and matches your company's profile.

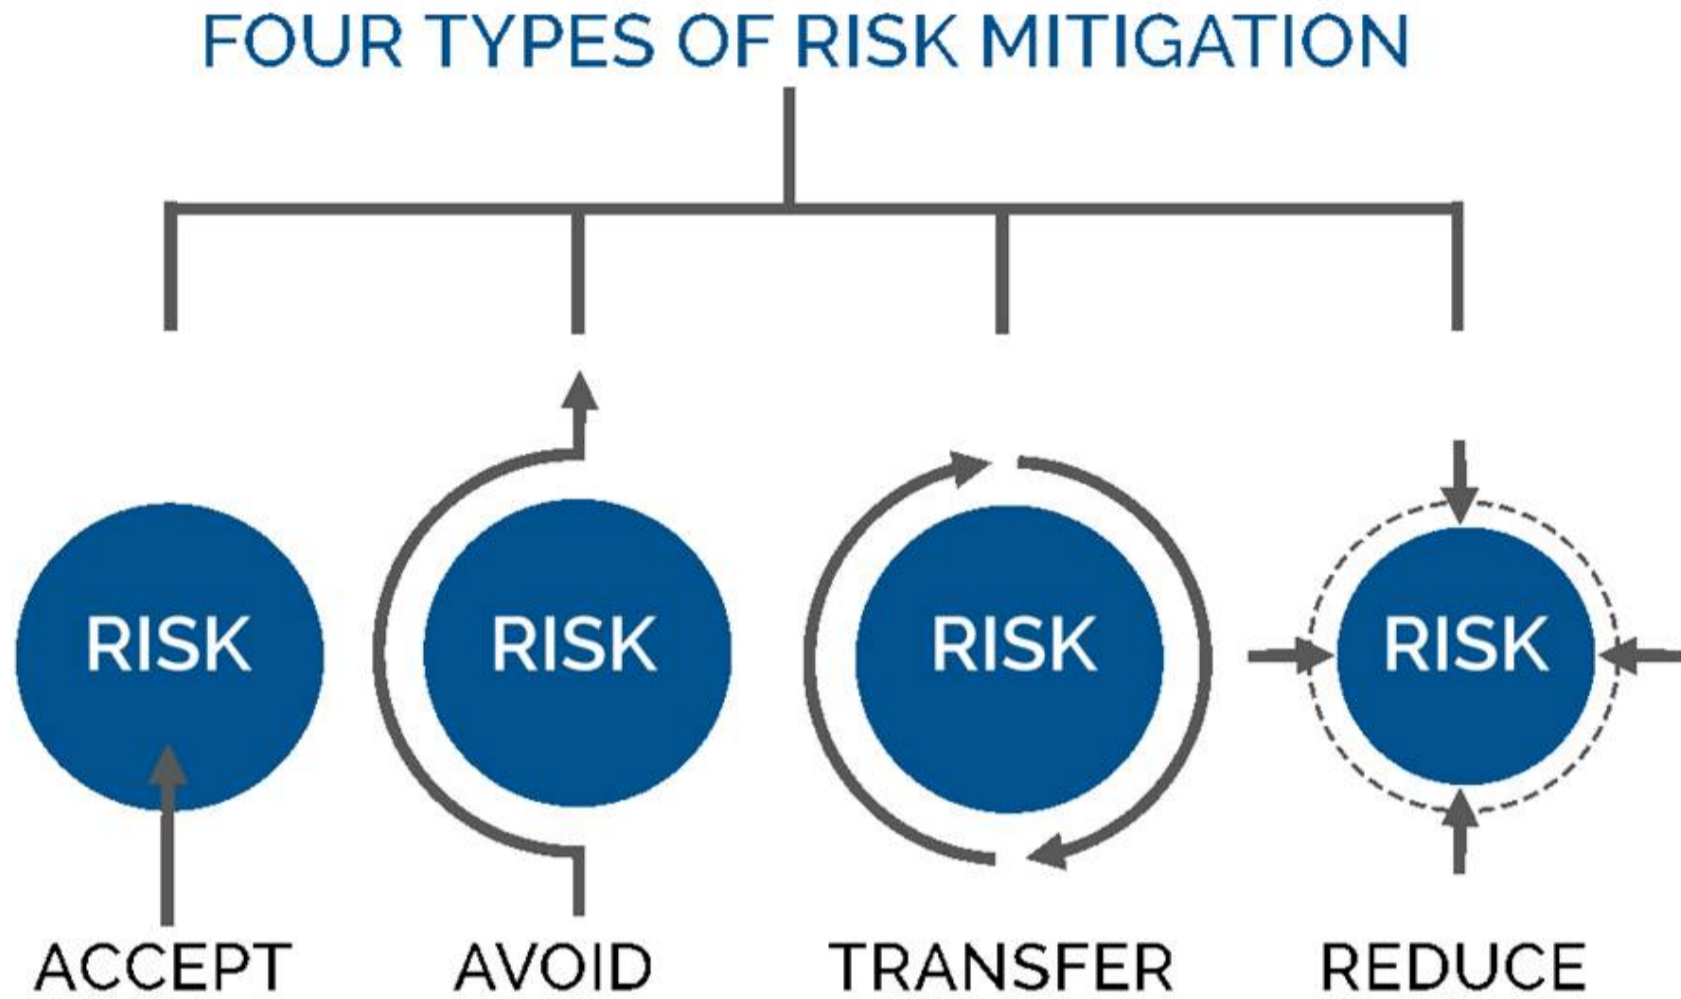

A picture containing diagram
 Description automatically generated
 Risk Acceptance

Risk acceptance does not reduce any effects; however, it is still considered a strategy. This strategy is a common option when the cost of other risk management options such as avoidance or limitation may outweigh the cost of the risk itself. A company that doesn't want to spend a lot of money on avoiding risks that do not have a high possibility of occurring will use the risk acceptance strategy.

Risk Avoidance

Risk avoidance is the opposite of risk acceptance. It is the action that avoids any exposure to the risk whatsoever. It's important to note that risk avoidance is usually the most expensive of all risk mitigation options.

Risk Limitation

Risk limitation is the most common risk management strategy used by businesses. This strategy limits a company's exposure by taking some action. It is a strategy employing a bit of risk acceptance and a bit of risk avoidance or an average of both. An example of risk limitation would be a company accepting that a disk drive may fail and avoiding a long period of failure by having backups.

Risk Transference

Risk transference is the involvement of handing risk off to a willing third party. For example, numerous companies outsource certain operations such as customer service, payroll

services, etc. This can be beneficial for a company if a transferred risk is not a core competency of that company. It can also be used so a company can focus more on its core competencies.

NEW QUESTION 132

- (Topic 1)

Although FTP traffic is not encrypted by default, which layer 3 protocol would allow for end- to-end encryption of the connection?

- A. SFTP
- B. Ipsec
- C. SSL
- D. FTPS

Answer: B

Explanation:

<https://en.wikipedia.org/wiki/IPsec>

Internet Protocol Security (IPsec) is a secure network protocol suite that authenticates and encrypts the packets of data to provide secure encrypted communication between two computers over an Internet Protocol network. It is used in virtual private networks (VPNs). IPsec includes protocols for establishing mutual authentication between agents at the beginning of a session and negotiation of cryptographic keys to use during the session. IPsec can protect data flows between a pair of hosts (host-to-host), between a pair of security gateways (network-to-network), or between a security gateway and a host (network-to-host).

IPsec uses cryptographic security services to protect communications over Internet Protocol (IP) networks. It supports network-level peer authentication, data-origin authentication, data integrity, data confidentiality (encryption), and replay protection. The initial IPv4 suite was developed with few security provisions. As a part of the IPv4 enhancement, IPsec is a layer 3 OSI model or internet layer end-to-end security scheme. In contrast, while some other Internet security systems in widespread use operate above layer 3, such as Transport Layer Security (TLS) that operates at the Transport Layer and Secure Shell (SSH) that operates at the Application layer, IPsec can automatically secure applications at the IP layer.

NEW QUESTION 135

- (Topic 1)

CompanyXYZ has asked you to assess the security of their perimeter email gateway. From your office in New York, you craft a specially formatted email message and send it across the Internet to an employee of CompanyXYZ. The employee of CompanyXYZ is aware of your test. Your email message looks like this:

From: jim_miller@companyxyz.com

To: michelle_saunders@companyxyz.com Subject: Test message Date: 4/3/2017 14:37

The employee of CompanyXYZ receives your email message.

This proves that CompanyXYZ's email gateway doesn't prevent what?

- A. Email Masquerading
- B. Email Harvesting
- C. Email Phishing
- D. Email Spoofing

Answer: D

Explanation:

Email spoofing is the fabrication of an email header in the hopes of duping the recipient into thinking the email originated from someone or somewhere other than the intended source. Because core email protocols do not have a built-in method of authentication, it is common for spam and phishing emails to use said spoofing to trick the recipient into trusting the origin of the message.

The ultimate goal of email spoofing is to get recipients to open, and possibly even respond to, a solicitation. Although the spoofed messages are usually just a nuisance requiring little action besides removal, the more malicious varieties can cause significant problems and sometimes pose a real security threat.

NEW QUESTION 136

- (Topic 1)

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Forcing the targeted keystream through a hardware-accelerated device such as an ASIC.
- B. A backdoor placed into a cryptographic algorithm by its creator.
- C. Extraction of cryptographic secrets through coercion or torture.
- D. Attempting to decrypt ciphertext by making logical assumptions about the contents of the original plaintext.

Answer: C

Explanation:

A powerful and often the most effective cryptanalysis method in which the attack is directed at the most vulnerable link in the cryptosystem - the person. In this attack, the cryptanalyst uses blackmail, threats, torture, extortion, bribery, etc. This method's main advantage is the decryption time's fundamental independence from the volume of secret information, the length of the key, and the cipher's mathematical strength.

The method can reduce the time to guess a password, for example, for AES, to an acceptable level; however, it requires special authorization from the relevant regulatory authorities. Therefore, it is outside the scope of this course and is not considered in its practical part.

NEW QUESTION 141

- (Topic 1)

Which of the following programs is usually targeted at Microsoft Office products?

- A. Polymorphic virus
- B. Multipart virus
- C. Macro virus
- D. Stealth virus

Answer: C

Explanation:

A macro virus is a virus that is written in a macro language: a programming language which is embedded inside a software application (e.g., word processors and spreadsheet applications). Some applications, such as Microsoft Office, allow macro programs to be embedded in documents such that the macros are run automatically when the document is opened, and this provides a distinct mechanism by which malicious computer instructions can spread. (Wikipedia)

NB: The virus Melissa is a well-known macro virus we could find attached to word documents.

NEW QUESTION 143

- (Topic 1)

A user on your Windows 2000 network has discovered that he can use L0phtcrack to sniff the SMB exchanges which carry user logons. The user is plugged into a hub with 23 other systems.

However, he is unable to capture any logons though he knows that other users are logging in.

What do you think is the most likely reason behind this?

- A. There is a NIDS present on that segment.
- B. Kerberos is preventing it.
- C. Windows logons cannot be sniffed.
- D. L0phtcrack only sniffs logons to web servers.

Answer: B

NEW QUESTION 146

- (Topic 1)

During a recent security assessment, you discover the organization has one Domain Name Server (DNS) in a Demilitarized Zone (DMZ) and a second DNS server on the internal network.

What is this type of DNS configuration commonly called?

- A. DynDNS
- B. DNS Scheme
- C. DNSSEC
- D. Split DNS

Answer: D

NEW QUESTION 147

- (Topic 2)

The tools which receive event logs from servers, network equipment, and applications, and perform analysis and correlation on those logs, and can generate alarms for security relevant issues, are known as what?

- A. network Sniffer
- B. Vulnerability Scanner
- C. Intrusion prevention Server
- D. Security incident and event Monitoring

Answer: D

NEW QUESTION 148

- (Topic 2)

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days, Steve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

Answer: C

Explanation:

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization. Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

NEW QUESTION 152

- (Topic 2)

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

Answer: D

NEW QUESTION 154

- (Topic 2)


Annie, a cloud security engineer, uses the Docker architecture to employ a client/server model in the application she is working on. She utilizes a component that can process API requests and handle various Docker objects, such as containers, volumes, images, and networks. What is the component of the Docker architecture used by Annie in the above scenario?

- A. Docker client
- B. Docker objects
- C. Docker daemon
- D. Docker registries

Answer: C

Explanation:

Docker uses a client-server design. The docker client talks to the docker daemon, that will the work of building, running, and distributing your docker containers. The docker client and daemon will run on the same system, otherwise you will connect a docker consumer to a remote docker daemon. The docker consumer and daemon communicate using a REST API, over OS sockets or a network interface.

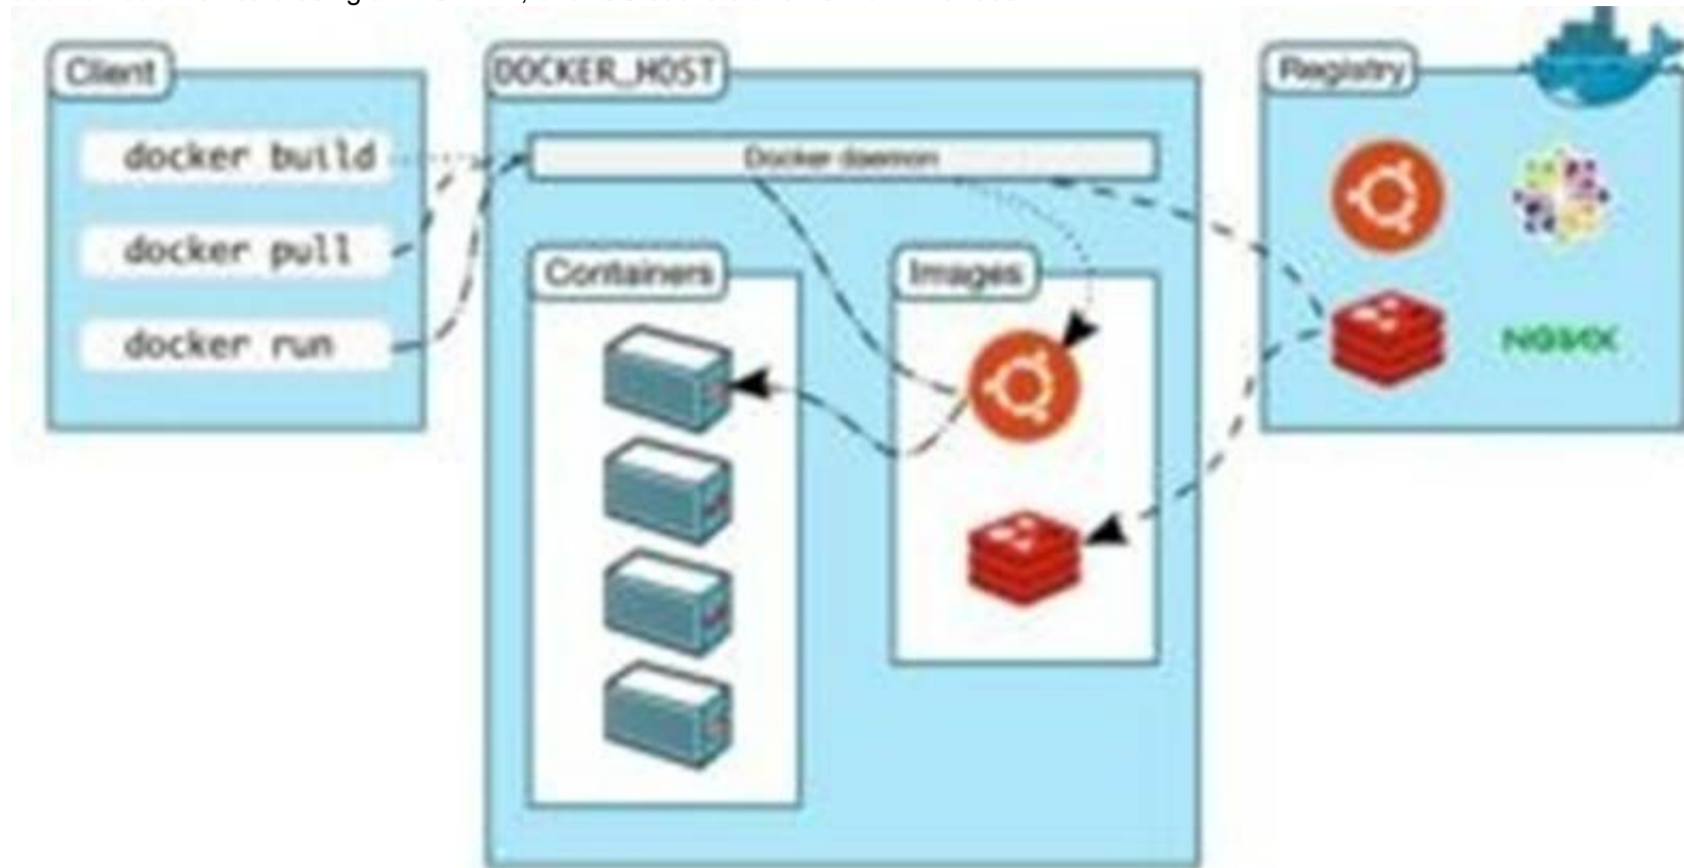

The docker daemon (dockerd) listens for docker API requests and manages docker objects like pictures, containers, networks, and volumes. A daemon may communicate with other daemons to manage docker services.

NEW QUESTION 158

- (Topic 2)

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials:

Username: 'attack' or 1=1 - Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. select * from Users where UserName = 'attack" or 1=1 -- and UserPassword = '123456'
- B. select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- C. select * from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'
- D. select * from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'

Answer: D

NEW QUESTION 163

- (Topic 2)

which of the following protocols can be used to secure an LDAP service against anonymous queries?

- A. SSO
- B. RADIUS
- C. WPA
- D. NTLM

Answer: D

Explanation:

In a Windows network, nongovernmental organization (New Technology) local area network Manager (NTLM) could be a suite of Microsoft security protocols supposed to produce authentication, integrity, and confidentiality to users. NTLM is that the successor to the authentication protocol in Microsoft local area network Manager (LANMAN), Associate in Nursing older Microsoft product. The NTLM protocol suite is enforced in an exceedingly Security Support supplier, which mixes the local area network Manager authentication protocol, NTLMv1, NTLMv2 and NTLM2 Session protocols in an exceedingly single package. whether or not these protocols area unit used or will be used on a system is ruled by cluster Policy settings, that totally different{completely different} versions of Windows have different default settings. NTLM passwords area unit thought-about weak as a result of they will be brute-forced very simply with fashionable hardware.

NTLM could be a challenge-response authentication protocol that uses 3 messages to authenticate a consumer in an exceedingly affiliation orientating setting (connectionless is similar), and a fourth extra message if integrity is desired.

? First, the consumer establishes a network path to the server and sends a

NEGOTIATE_MESSAGE advertising its capabilities.

? Next, the server responds with CHALLENGE_MESSAGE that is employed to determine the identity of the consumer.

? Finally, the consumer responds to the challenge with Associate in Nursing AUTHENTICATE_MESSAGE.

The NTLM protocol uses one or each of 2 hashed word values, each of that are keep on the server (or domain controller), and that through a scarcity of seasoning area unit word equivalent, that means that if you grab the hash price from the server, you??ll evidence while not knowing the particular word. the 2 area unit the lm Hash (a DES-based operate applied to the primary fourteen chars of the word born-again to the standard eight bit laptop charset for the language), and also the nt Hash (MD4 of the insufficient endian UTF-16 Unicode password). each hash values area unit sixteen bytes (128 bits) every.

The NTLM protocol additionally uses one among 2 a method functions, looking on the NTLM version. National Trust LanMan and NTLM version one use the DES primarily based LanMan a method operate (LMOWF), whereas National TrustLMv2 uses the NT MD4 primarily based a method operate (NTOWF).

NEW QUESTION 167

- (Topic 2)

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report:??The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3??s Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks.??Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won??t stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact alittle amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an ??Evil Twin?? Access Point or a Rogue Access Point into a Wi-Fi environment, we??ve been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the ??Evil Twin?? Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What??s next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn??t provide protection from the six known Wi-Fi threat categories. It??s highly likely that we??ll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we??re asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 172

- (Topic 2)

John, a professional hacker, targeted an organization that uses LDAP for accessing distributed directory services. He used an automated tool to anonymously query the IDAP service for sensitive information such as usernames, addresses, departmental details, and server names to launch further attacks on the target organization.

What is the tool employed by John to gather information from the IDAP service?

- A. jxplorer
- B. Zabasearch
- C. EarthExplorer
- D. Ike-scan

Answer: A

Explanation:

JXplorer could be a cross platform LDAP browser and editor. it??s a standards compliant general purpose LDAP client which will be used to search, scan and edit any commonplace LDAP directory, or any directory service with an LDAP or DSML interface. It is extremely flexible and can be extended and custom in a very number of the way. JXplorer is written in java, and also the source code and source code build system ar obtainable via svn or as a packaged build for users who wish to experiment or any develop the program. JX is available in 2 versions; the free open source version under an OSI Apache two style licence, or within the JXWorkBench Enterprise bundle with inbuilt reporting, administrative and security tools. JX has been through a number of different versions since its creation in 1999; the foremost recent stable release is version 3.3.1, the August 2013 release. JXplorer could be a absolutely useful LDAP consumer with advanced security integration and support for the harder and obscure elements of the LDAP protocol. it??s been tested on Windows, Solaris, linux and OSX, packages are obtainable for HPUNIX, AIX, BSD and it should run on any java supporting OS.

NEW QUESTION 173

- (Topic 2)

During an Xmas scan what indicates a port is closed?

- A. No return response
- B. RST
- C. ACK
- D. SYN

Answer: B

NEW QUESTION 178

- (Topic 2)

SQL injection (SQLi) attacks attempt to inject SQL syntax into web requests, which may Bypass authentication and allow attackers to access and/or modify data attached to a web application.

Which of the following SQLI types leverages a database server's ability to make DNS requests to pass data to an attacker?

- A. Union-based SQLI
- B. Out-of-band SQLI
- C. In-band SQLI
- D. Time-based blind SQLI

Answer: B

Explanation:

Out-of-band SQL injection occurs when an attacker is unable to use an equivalent channel to launch the attack and gather results. Out-of-band SQLi techniques would believe the database server's ability to form DNS or HTTP requests to deliver data to an attacker. Out-of-band SQL injection is not very common, mostly because it depends on features being enabled on the database server being used by the web application. Out-of-band SQL injection occurs when an attacker is unable to use the same channel to launch the attack and gather results.

Out-of-band techniques, offer an attacker an alternative to inferential time-based techniques, especially if the server responses are not very stable (making an inferential time-based attack unreliable).

Out-of-band SQLi techniques would rely on the database server's ability to make DNS or HTTP requests to deliver data to an attacker. Such is the case with Microsoft SQL Server's xp_dirtree command, which can be used to make DNS requests to a server an attacker controls; as well as Oracle Database's UTL_HTTP package, which can be used to send HTTP requests from SQL and PL/SQL to a server an attacker controls.

NEW QUESTION 180

- (Topic 2)

Ethical hacker Jane Smith is attempting to perform an SQL injection attack. She wants to test the response time of a true or false response and wants to use a second command to determine whether the database will return true or false results for user IDs. Which two SQL Injection types would give her the results she is looking for?

- A. Out of band and boolean-based
- B. Time-based and union-based
- C. union-based and error-based
- D. Time-based and boolean-based

Answer: D

Explanation:

Boolean based we mean that it is based on Boolean values, that is, true or false / true and false. AND Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Boolean-based (content-based) Blind SQLi

Boolean-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the application to return a different result depending on whether the query returns a TRUE or FALSE result.

Depending on the result, the content within the HTTP response will change, or remain the same. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database, character by character.

Time-based Blind SQLi

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Depending on the result, an HTTP response will be returned with a delay, or returned immediately. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database character by character.

<https://www.acunetix.com/websitesecurity/sql-injection2/>

NEW QUESTION 185

- (Topic 2)

The Payment Card Industry Data Security Standard (PCI DSS) contains six different categories of control objectives. Each objective contains one or more requirements, which must be followed in order to achieve compliance. Which of the following requirements would best fit under the objective, "Implement strong access control measures"?

- A. Regularly test security systems and processes.
- B. Encrypt transmission of cardholder data across open, public networks.
- C. Assign a unique ID to each person with computer access.
- D. Use and regularly update anti-virus software on all systems commonly affected by malware.

Answer: C

NEW QUESTION 188

- (Topic 2)

In the Common Vulnerability Scoring System (CVSS) v3.1 severity ratings, what range does medium vulnerability fall in?

- A. 3.0-6.9
- B. 4.0-6.0
- C. 4.0-6.9
- D. 3.9-6.9

Answer: C

Explanation:

CVSS v2.0 Ratings

CVSS v3.0 Ratings

Severity	Base Score Range	Severity	Base Score Range
		None	0.0
Low	0.0-3.9	Low	0.1-3.9
Medium	4.0-6.9	Medium	4.0-6.9
High	7.0-10.0	High	7.0-8.9
		Critical	9.0-10.0

NEW QUESTION 192

- (Topic 2)

which of the following Bluetooth hacking techniques refers to the theft of information from a wireless device through Bluetooth?

- A. Bluesmacking
- B. Bluebugging
- C. Bluejacking
- D. Bluesnarfing

Answer: D

Explanation:

Bluesnarfing is the unauthorized access of information from a wireless device through a Bluetooth connection, often between phones, desktops, laptops, and PDAs (personal digital assistant).

NEW QUESTION 196

- (Topic 2)

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 198

- (Topic 2)

Within the context of Computer Security, which of the following statements describes Social Engineering best?

- A. Social Engineering is the act of publicly disclosing information
- B. Social Engineering is the means put in place by human resource to perform time accounting
- C. Social Engineering is the act of getting needed information from a person rather than breaking into a system
- D. Social Engineering is a training program within sociology studies

Answer: C

NEW QUESTION 203

- (Topic 2)

Larry, a security professional in an organization, has noticed some abnormalities in the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting a countermeasures to secure the accounts on the web server.

Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or root-level access to the minimum number of users
- D. Retain all unused modules and application extensions

Answer: C

NEW QUESTION 207

- (Topic 2)

Bella, a security professional working at an IT firm, finds that a security breach has occurred while transferring important files. Sensitive data, employee usernames, and passwords are shared in plaintext, paving the way for hackers to perform successful session hijacking. To address this situation, Bella implemented a protocol that sends data using encryption and digital certificates. Which of the following protocols is used by Bella?

- A. FTP
- B. HTTPS
- C. FTPS
- D. IP

Answer: C

Explanation:

The File Transfer Protocol (FTP) is a standard organization convention utilized for the exchange of PC records from a worker to a customer on a PC organization. FTP is based on a customer worker model engineering utilizing separate control and information associations between the customer and the server.[1] FTP clients may validate themselves with an unmistakable book sign-in convention, ordinarily as a username and secret key, however can interface namelessly if the worker is designed to permit it. For secure transmission that ensures the username and secret phrase, and scrambles the substance, FTP is frequently made sure about with SSL/TLS (FTPS) or supplanted with SSH File Transfer Protocol (SFTP).

The primary FTP customer applications were order line programs created prior to working frameworks had graphical UIs, are as yet dispatched with most Windows, Unix, and Linux working systems.[2][3] Many FTP customers and mechanization utilities have since been created for working areas, workers, cell phones, and equipment, and FTP has been fused into profitability applications, for example, HTML editors.

NEW QUESTION 211

- (Topic 2)

is a tool that can hide processes from the process list, can hide files, registry entries, and intercept keystrokes.

- A. Trojan
- B. RootKit
- C. DoS tool
- D. Scanner
- E. Backdoor

Answer: B

NEW QUESTION 216

- (Topic 2)

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

Answer: C

Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,??) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

NEW QUESTION 221

- (Topic 2)

Bob, your senior colleague, has sent you a mail regarding a deal with one of the clients. You are requested to accept the offer and you oblige. After 2 days, Bob denies that he had ever sent a mail. What do you want to "know" to prove yourself that it was Bob who had sent a mail?

- A. Authentication
- B. Confidentiality
- C. Integrity
- D. Non-Repudiation

Answer: D

Explanation:

Non-repudiation is the assurance that someone cannot deny the validity of something.

Non-repudiation is a legal concept that is widely used in information security and refers to a service, which provides proof of the origin of data and the integrity of the data. In other words, non-repudiation makes it very difficult to successfully deny who/where a message came from as well as the authenticity and integrity of that message.

NEW QUESTION 224

- (Topic 2)

Jason, an attacker, targeted an organization to perform an attack on its Internet-facing web server with the intention of gaining access to backend servers, which are protected by a firewall. In this process, he used a URL <https://xyz.com/feed.php?url:externalsile.com/feed/to> to obtain a remote feed and altered the URL input to the local host to view all the local resources on the target server. What is the type of attack Jason performed in the above scenario?

- A. website defacement
- B. Server-side request forgery (SSRF) attack

- C. Web server misconfiguration
- D. web cache poisoning attack

Answer: B

Explanation:

Server-side request forgery (also called SSRF) is a net security vulnerability that allows an assaulter to induce the server-side application to make http requests to associate arbitrary domain of the attacker??s choosing.

In typical SSRF examples, the attacker might cause the server to make a connection back to itself, or to other web-based services among the organization??s infrastructure, or to external third-party systems.

Another type of trust relationship that often arises with server-side request forgery is where the application server is able to interact with different back-end systems that aren??t directly reachable by users. These systems typically have non-routable private informatics addresses. Since the back-end systems normally ordinarily protected by the topology, they typically have a weaker security posture. In several cases, internal back-end systems contain sensitive functionality that may be accessed while not authentication by anyone who is able to act with the systems.

In the preceding example, suppose there??s an body interface at the back-end url <https://192.168.0.68/admin>. Here, an attacker will exploit the SSRF vulnerability to access the executive interface by submitting the following request:

```
POST /product/stock HTTP/1.0
```

```
Content-Type: application/x-www-form-urlencoded Content-Length: 118 stockApi=http://192.168.0.68/admin
```

NEW QUESTION 225

- (Topic 2)

How can you determine if an LM hash you extracted contains a password that is less than 8 characters long?

- A. There is no way to tell because a hash cannot be reversed
- B. The right most portion of the hash is always the same
- C. The hash always starts with AB923D
- D. The left most portion of the hash is always the same
- E. A portion of the hash will be all 0's

Answer: B

NEW QUESTION 230

- (Topic 2)

John is an incident handler at a financial institution. His steps in a recent incident are not up to the standards of the company. John frequently forgets some steps and procedures while handling responses as they are very stressful to perform. Which of the following actions should John take to overcome this problem with the least administrative effort?

- A. Create an incident checklist.
- B. Select someone else to check the procedures.
- C. Increase his technical skills.
- D. Read the incident manual every time it occurs.

Answer: C

NEW QUESTION 233

- (Topic 2)

What is the first step for a hacker conducting a DNS cache poisoning (DNS spoofing) attack against an organization?

- A. The attacker queries a nameserver using the DNS resolver.
- B. The attacker makes a request to the DNS resolver.
- C. The attacker forges a reply from the DNS resolver.
- D. The attacker uses TCP to poison the DNS resolver.

Answer: B

Explanation:

https://ru.wikipedia.org/wiki/DNS_spoofing

DNS spoofing is a threat that copies the legitimate server destinations to divert the domain's traffic. Ignorant these attacks, the users are redirected to malicious websites, which results in insensitive and personal data being leaked. It is a method of attack where your DNS server is tricked into saving a fake DNS entry. This will make the DNS server recall a fake site for you, thereby posing a threat to vital information stored on your server or computer.

The cache poisoning codes are often found in URLs sent through spam emails. These emails are sent to prompt users to click on the URL, which infects their computer. When the computer is poisoned, it will divert you to a fake IP address that looks like a real thing. This way, the threats are injected into your systems as well.

Different Stages of Attack of DNS Cache Poisoning:

- The attacker proceeds to send DNS queries to the DNS resolver, which forwards the Root/TLD authoritative DNS server request and awaits an answer.
- The attacker overloads the DNS with poisoned responses that contain several IP addresses of the malicious website. To be accepted by the DNS resolver, the attacker's response should match a port number and the query ID field before the DNS response. Also, the attackers can force its response to increasing their chance of success.
- If you are a legitimate user who queries this DNS resolver, you will get a poisoned response from the cache, and you will be automatically redirected to the malicious website.

NEW QUESTION 238

- (Topic 2)

Bob is going to perform an active session hijack against Brownies Inc. He has found a target that allows session oriented connections (Telnet) and performs the sequence prediction on the target operating system. He manages to find an active session due to the high level of traffic on the network. What is Bob supposed to do next?

- A. Take over the session
- B. Reverse sequence prediction
- C. Guess the sequence numbers
- D. Take one of the parties offline

Answer: C

NEW QUESTION 241

- (Topic 2)

Clark is a professional hacker. He created and configured multiple domains pointing to the same host to switch quickly between the domains and avoid detection. Identify the behavior of the adversary In the above scenario.

- A. use of command-line interface
- B. Data staging
- C. Unspecified proxy activities
- D. Use of DNS tunneling

Answer: C

Explanation:

A proxy server acts as a gateway between you and therefore the internet. It??s an intermediary server separating end users from the websites they browse. Proxy servers provide varying levels of functionality, security, and privacy counting on your use case, needs, or company policy.If you??re employing a proxy server, internet traffic flows through the proxy server on its thanks to the address you requested. A proxy server is essentially a computer on the web with its own IP address that your computer knows. once you send an internet request, your request goes to the proxy server first. The proxy server then makes your web request on your behalf, collects the response from the online server, and forwards you the online page data so you??ll see the page in your browser.

NEW QUESTION 245

- (Topic 2)

In order to tailor your tests during a web-application scan, you decide to determine which web-server version is hosting the application. On using the sV flag with Nmap. you obtain the following response:

80/tcp open http-proxy Apache Server 7.1.6

what Information-gathering technique does this best describe?

- A. WhoiS lookup
- B. Banner grabbing
- C. Dictionary attack
- D. Brute forcing

Answer: B

Explanation:

Banner grabbing is a technique wont to gain info about a computer system on a network and the services running on its open ports. administrators will use this to take inventory of the systems and services on their network. However, an to find will use banner grabbing so as to search out network hosts that are running versions of applications and operating systems with known exploits.

Some samples of service ports used for banner grabbing are those used by Hyper Text

Transfer Protocol (HTTP), File Transfer Protocol (FTP), and Simple Mail Transfer Protocol (SMTP); ports 80, 21, and 25 severally. Tools normally used to perform banner grabbing are Telnet, nmap and Netcat.

For example, one may establish a connection to a target internet server using Netcat, then send an HTTP request. The response can usually contain info about the service running on the host:

```
[root@prober]# nc www.targethost.com 80
HEAD / HTTP/1.1

HTTP/1.1 200 OK
Date: Mon, 11 May 2009 22:18:48 EST
Server: Apache/2.0.46 (Unix) (Red Hat/Linux)
Last-Modified: Thu, 10 Apr 2009 11:20:14 PST
Etag: "1996-696-1234abcd"
Accept-Ranges: bytes
Content-Length: 1110
Connection: close
Content-Type: text/html
```

This information may be used by an administrator to catalog this system, or by an intruder to narrow down a list of applicable exploits.To prevent this, network administrators should restrict access to services on their networks and shut down unused or unnecessary services running on network hosts. Shodan is a search engine for banners grabbed from portscanning the Internet.

NEW QUESTION 250

- (Topic 2)

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: C

Explanation:

Analyze Web Applications: Identify Files and Directories - enumerate applications, as well as hidden directories and files of the web application hosted on the web server. Tools such as Gobuster is directory scanner that allows attackers to perform fast-paced enumeration of hidden files and directories of a target web application. # gobuster -u <target URL> -w common.txt (wordlist) (P.1849/1833)

NEW QUESTION 255

- (Topic 2)

Johnson, an attacker, performed online research for the contact details of reputed cybersecurity firms. He found the contact number of sibertech.org and dialed the number, claiming himself to represent a technical support team from a vendor. He warned that a specific server is about to be compromised and requested sibertech.org to follow the provided instructions. Consequently, he prompted the victim to execute unusual commands and install malicious files, which were then used to collect and pass critical Information to Johnson's machine. What is the social engineering technique Steve employed in the above scenario?

- A. Quid pro quo
- B. Diversion theft
- C. Elicitation
- D. Phishing

Answer: A

Explanation:

<https://www.eccouncil.org/what-is-social-engineering/>

This Social Engineering scam involves an exchange of information that can benefit both the victim and the trickster. Scammers would make the prey believe that a fair exchange will be present between both sides, but in reality, only the fraudster stands to benefit, leaving the victim hanging on to nothing. An example of a Quid Pro Quo is a scammer pretending to be an IT support technician. The con artist asks for the login credentials of the company's computer saying that the company is going to receive technical support in return. Once the victim has provided the credentials, the scammer now has control over the company's computer and may possibly load malware or steal personal information that can be a motive to commit identity theft.

"A quid pro quo attack (aka something for something?? attack) is a variant of baiting. Instead of baiting a target with the promise of a good, a quid pro quo attack promises a service or a benefit based on the execution of a specific action." <https://resources.infosecinstitute.com/topic/common-social-engineering-attacks/#:~:text=A%20quid%20pro%20quo%20attack,execution%20of%20a%20specific%20action.>

NEW QUESTION 259

- (Topic 2)

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 260

- (Topic 2)

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397- 1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.
- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the ??501?? at the end of the SID.

Answer: A

NEW QUESTION 263

- (Topic 2)

Gavin owns a white-hat firm and is performing a website security audit for one of his clients. He begins by running a scan which looks for common misconfigurations and outdated software versions. Which of the following tools is he most likely using?

- A. Nikto
- B. Nmap
- C. Metasploit
- D. Armitage

Answer: B

NEW QUESTION 265

- (Topic 2)

Abel, a cloud architect, uses container technology to deploy applications/software including all its dependencies, such as libraries and configuration files, binaries, and other resources that run independently from other processes in the cloud environment. For the containerization of applications, he follows the five-tier container technology architecture. Currently, Abel is verifying and validating image contents, signing images, and sending them to the registries. Which of the following tiers of the container technology architecture is Abel currently working in?

- A. Tier-1: Developer machines
- B. Tier-4: Orchestrators

- C. Tier-3: Registries
- D. Tier-2: Testing and accreditation systems

Answer: D

Explanation:

The official management decision given by a senior agency official to authorize operation of an information system and to explicitly accept the risk to agency operations (including mission, functions, image, or reputation), agency assets, or individuals, based on the implementation of an agreed-upon set of security controls. formal declaration by a designated accrediting authority (DAA) or principal accrediting authority (PAA) that an information system is approved to operate at an acceptable level of risk, based on the implementation of an approved set of technical, managerial, and procedural safeguards. See authorization to operate (ATO). Rationale: The Risk Management Framework uses a new term to refer to this concept, and it is called authorization.

Identifies the information resources covered by an accreditation decision, as distinguished from separately accredited information resources that are interconnected or with which information is exchanged via messaging. Synonymous with Security Perimeter.

For the purposes of identifying the Protection Level for confidentiality of a system to be accredited, the system has a conceptual boundary that extends to all intended users of the system, both directly and indirectly connected, who receive output from the system. See authorization boundary. Rationale: The Risk Management Framework uses a new term to refer to the concept of accreditation, and it is called authorization. Extrapolating, the accreditation boundary would then be referred to as the authorization boundary.

NEW QUESTION 267

- (Topic 2)

Security administrator John Smith has noticed abnormal amounts of traffic coming from local computers at night. Upon reviewing, he finds that user data have been exfiltrated by an attacker. AV tools are unable to find any malicious software, and the IDS/IPS has not reported on any non-whitelisted programs, what type of malware did the attacker use to bypass the company's application whitelisting?

- A. Phishing malware
- B. Zero-day malware
- C. File-less malware
- D. Logic bomb malware

Answer: C

Explanation:

<https://www.mcafee.com/enterprise/en-us/security-awareness/ransomware/what-is-fileless-malware.html>

Fileless malware can easily evade various security controls, organizations need to focus on monitoring, detecting, and preventing malicious activities instead of using traditional approaches such as scanning for malware through file signatures. Also known as non-malware, infects legitimate software, applications, and other protocols existing in the system to perform various malicious activities. It resides in the system's RAM. It injects malicious code into the running processes. (P.966/950)

NEW QUESTION 269

- (Topic 2)

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam. Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

Answer: D

NEW QUESTION 271

- (Topic 2)

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 273

- (Topic 2)

A newly joined employee, Janet, has been allocated an existing system used by a previous employee. Before issuing the system to Janet, it was assessed by Martin, the administrator. Martin found that there were possibilities of compromise through user directories, registries, and other system parameters. He also identified vulnerabilities such as native configuration tables, incorrect registry or file permissions, and software configuration errors. What is the type of vulnerability assessment performed by Martin?

- A. Credentialed assessment
- B. Database assessment
- C. Host-based assessment
- D. Distributed assessment

Answer: C

Explanation:

The host-based vulnerability assessment (VA) resolution arose from the auditors?? got to periodically review systems. Arising before the net becoming common, these tools typically take an ??administrator??s eye?? read of the setting by evaluating all of the knowledge that an administrator has at his or her disposal. UsesHost VA tools verify system configuration, user directories, file systems, registry settings, and all forms of other info on a number to gain information about it. Then, it evaluates the chance of compromise. it should also live compliance to a predefined company policy so as to satisfy an annual audit. With administrator access, the scans area unit less possible to disrupt traditional operations since the computer code has the access it has to see into the complete configuration of the system.

What it Measures Host

VA tools will examine the native configuration tables and registries to spot not solely apparent vulnerabilities, however additionally ??dormant?? vulnerabilities – those weak or misconfigured systems and settings which will be exploited when an initial entry into the setting. Host VA solutions will assess the safety settings of a user account table; the access management lists related to sensitive files or data; and specific levels of trust applied to other systems. The host VA resolution will a lot of accurately verify the extent of the danger by determinant however way any specific exploit could also be ready to get.

Types of Vulnerability Assessment Host-based assessments are a type of security check that involve conducting a configuration-level check to identify system configurations, user directories, file systems, registry settings, and other parameters to evaluate the possibility of compromise. Host-based scanners assess systems to identify vulnerabilities such as native configuration tables, incorrect registry or file permissions, and software configuration errors. (P.528/512)

NEW QUESTION 274

- (Topic 2)

You have successfully logged on a Linux system. You want to now cover your trade Your login attempt may be logged on several files located in /var/log. Which file does NOT belongs to the list:

- A. user.log
- B. auth.fesg
- C. wtmp
- D. btmp

Answer: C

NEW QUESTION 276

- (Topic 2)

Widespread fraud ac Enron. WorldCom, and Tyco led to the creation of a law that was designed to improve the accuracy and accountability of corporate disclosures. It covers accounting firms and third parties that provide financial services to some organizations and came into effect in 2002. This law is known by what acronym?

- A. Fed RAMP
- B. PCIDSS
- C. SOX
- D. HIPAA

Answer: C

Explanation:

The Sarbanes-Oxley Act of 2002 could be a law the U.S. Congress passed on July thirty of that year to assist defend investors from fallacious money coverage by companies. Also called the SOX Act of 2002 and also the company Responsibility Act of 2002, it mandated strict reforms to existing securities rules and obligatory powerful new penalties on law breakers.

The Sarbanes-Oxley law Act of 2002 came in response to money scandals within the early 2000s involving in public listed corporations like Enron Corporation, Tyco International plc, and WorldCom. The high-profile frauds cask capitalist confidence within the trustiness of company money statements Associate in Nursing light-emitting diode several to demand an overhaul of decades-old restrictive standards.

NEW QUESTION 279

- (Topic 2)

Bill is a network administrator. He wants to eliminate unencrypted traffic inside his company's network. He decides to setup a SPAN port and capture all traffic to the datacenter. He immediately discovers unencrypted traffic in port UDP 161. what protocol is this port using and how can he secure that traffic?

- A. it is not necessary to perform any actions, as SNMP is not carrying important information.
- B. SNMP and he should change it to SNMP V3
- C. RPC and the best practice is to disable RPC completely
- D. SNMP and he should change it to SNMP v2, which is encrypted

Answer: B

Explanation:

We have various articles already in our documentation for setting up SNMPv2 trap handling in Opsview, but SNMPv3 traps are a whole new ballgame. They can be quite confusing and complicated to set up the first time you go through the process, but when you understand what is going on, everything should make more sense.

SNMP has gone through several revisions to improve performance and security (version 1, 2c and 3). By default, it is a UDP port based protocol where communication is based on a ??fire and forget?? methodology in which network packets are sent to another device, but there is no check for receipt of that packet (versus TCP port when a network packet must be acknowledged by the other end of the communication link).

There are two modes of operation with SNMP – get requests (or polling) where one device requests information from an SNMP enabled device on a regular basis (normally using UDP port 161), and traps where the SNMP enabled device sends a message to another device when an event occurs (normally using UDP port 162). The latter includes instances such as someone logging on, the device powering up or down, or a wide variety of other problems that would need this type of investigation.

This blog covers SNMPv3 traps, as polling and version 2c traps are covered elsewhere in our documentation.

SNMP traps Since SNMP is primarily a UDP port based system, traps may be ??lost?? when sending between devices; the sending device does not wait to see if the receiver got the trap. This means if the configuration on the sending device is wrong (using the wrong receiver IP address or port) or the receiver isn??t listening for traps or rejecting them out of hand due to misconfiguration, the sender will never know.

The SNMP v2c specification introduced the idea of splitting traps into two types; the original ??hope it gets there?? trap and the newer ??INFORM?? traps. Upon receipt of an INFORM, the receiver must send an acknowledgement back. If the sender doesn??t get the acknowledgement back, then it knows there is an existing problem and can log it for sysadmins to find when they interrogate the device.

NEW QUESTION 282

- (Topic 2)

What is the common name for a vulnerability disclosure program opened by companies in platforms such as HackerOne?

- A. Vulnerability hunting program
- B. Bug bounty program
- C. White-hat hacking program
- D. Ethical hacking program

Answer: B

Explanation:

Bug bounty programs allow independent security researchers to report bugs to an companies and receive rewards or compensation. These bugs area unit sometimes security exploits and vulnerabilities, although they will additionally embody method problems, hardware flaws, and so on. The reports area unit usually created through a program travel by associate degree freelance third party (like Bugcrowd or HackerOne). The companies can got wind of (and run) a program curated to the organization??s wants. Programs is also non-public (invite-only) wherever reports area unit unbroken confidential to the organization or public (where anyone will sign in and join). they will happen over a collection timeframe or with without stopping date (though the second possibility is a lot of common). Who uses bug bounty programs?Many major organizations use bug bounties as an area of their security program, together with AOL, Android, Apple, Digital Ocean, and goldman Sachs. you??ll read an inventory of all the programs offered by major bug bounty suppliers, Bugcrowd and HackerOne, at these links. Why do corporations use bug bounty programs?Bug bounty programs provide corporations the flexibility to harness an outsized cluster of hackers so as to seek out bugs in their code. This gives them access to a bigger variety of hackers or testers than they??d be able to access on a one-on-one basis. It {can also|also will|can even|may also|may} increase the probabilities that bugs area unit found and reported to them before malicious hackers can exploit them. It may also be an honest publicity alternative for a firm. As bug bounties became a lot of common, having a bug bounty program will signal to the general public and even regulators that a corporation incorporates a mature security program. This trend is likely to continue, as some have began to see bug bounty programs as an business normal that all companies ought to invest in. Why do researchers and hackers participate in bug bounty programs?Finding and news bugs via a bug bounty program may end up in each money bonuses and recognition. In some cases, it will be a good thanks to show real-world expertise once you are looking for employment, or will even facilitate introduce you to parents on the protection team within an companies. This can be full time income for a few of us, income to supplement employment, or the way to point out off your skills and find a full time job. It may also be fun! it is a nice (legal) probability to check out your skills against huge companies and government agencies. What area unit the disadvantages of a bug bounty program for independent researchers and hackers?A lot of hackers participate in these varieties of programs, and it will be tough to form a major quantity of cash on the platform. In order to say the reward, the hacker has to be the primary person to submit the bug to the program. meaning that in apply, you may pay weeks searching for a bug to use, solely to be the person to report it and build no cash. Roughly ninety seven of participants on major bug bounty platforms haven??t sold-out a bug. In fact, a 2019 report from HackerOne confirmed that out of quite three hundred,000 registered users, solely around two.5% received a bounty in their time on the platform. Essentially, most hackers are not creating a lot of cash on these platforms, and really few square measure creating enough to switch a full time wage (plus they do not have advantages like vacation days, insurance, and retirement planning). What square measure the disadvantages of bug bounty programs for organizations?These programs square measure solely helpful if the program ends up in the companies realizeing issues that they weren??t able to find themselves (and if they??ll fix those problems)! If the companies is not mature enough to be able to quickly rectify known problems, a bug bounty program is not the right alternative for his or her companies. Also, any bug bounty program is probably going to draw in an outsized range of submissions, several of which can not be high-quality submissions. a corporation must be ready to cope with the exaggerated volume of alerts, and also the risk of a coffee signal to noise magnitude relation (essentially that it??s probably that they??re going to receive quite few unhelpful reports for each useful report). Additionally, if the program does not attract enough participants (or participants with the incorrect talent set, and so participants are not able to establish any bugs), the program is not useful for the companies. The overwhelming majority of bug bounty participants consider web site vulnerabilities (72%, per HackerOn), whereas solely a number of (3.5%) value more highly to seek for package vulnerabilities. This is probably because of the actual fact that hacking in operation systems (like network hardware and memory) needs a big quantity of extremely specialised experience. this implies that firms may even see vital come on investment for bug bounties on websites, and not for alternative applications, notably those that need specialised experience. This conjointly implies that organizations which require to look at AN application or web site among a selected time-frame may not need to rely on a bug bounty as there is no guarantee of once or if they receive reports. Finally, it are often probably risky to permit freelance researchers to try to penetrate your network. this could end in public speech act of bugs, inflicting name harm within the limelight (which could end in individuals not eager to purchase the organizations?? product or service), or speech act of bugs to additional malicious third parties, United Nations agency may use this data to focus on the organization.

NEW QUESTION 283

- (Topic 2)

Take a look at the following attack on a Web Server using obstructed URL:

```
http://www.certifiedhacker.com/script.ext?
template=%2e%2e%2f%2e%2e%2f%2e%2e%2f%65%74%63%2f%70%61%73%73%77%64
This request is made up of:
%2e%2e%2f%2e%2f%2e%2e%2f = ../ ../ ../
%65%74%63 = etc
%2f = /
%70%61%73%73%77%64 = passwd
```

How would you protect from these attacks?

- A. Configure the Web Server to deny requests involving "hex encoded" characters
- B. Create rules in IDS to alert on strange Unicode requests
- C. Use SSL authentication on Web Servers
- D. Enable Active Scripts Detection at the firewall and routers

Answer: B

NEW QUESTION 286

- (Topic 2)

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 287

- (Topic 2)

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

Answer: B

Explanation:

Webhooks are one of a few ways internet applications will communicate with one another.

It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered. The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data. Here's a visual representation of what that looks like:

Stripped down view of webhooks in action



A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the payload.

Here's an example of what a webhook url looks like with the payload it's carrying:

```
https://yourapp.com/data/12345?customer=bob&value=10.00&item=paper
To: yourapp.com/data/12345
Customer: Bob
Value: 10.00
Item: Paper
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called Reverse APIs as they provide what is

required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

NEW QUESTION 290

- (Topic 2)

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server? The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 295

- (Topic 2)

The network team has well-established procedures to follow for creating new rules on the firewall. This includes having approval from a manager prior to implementing any new rules. While reviewing the firewall configuration, you notice a recently implemented rule but cannot locate manager approval for it. What would be a good step to have in the procedures for a situation like this?

- A. Have the network team document the reason why the rule was implemented without prior manager approval.
- B. Monitor all traffic using the firewall rule until a manager can approve it.
- C. Do not roll back the firewall rule as the business may be relying upon it, but try to get manager approval as soon as possible.
- D. Immediately roll back the firewall rule until a manager can approve it

Answer: D

NEW QUESTION 300

- (Topic 2)

There are multiple cloud deployment options depending on how isolated a customer's resources are from those of other customers. Shared environments share the costs and allow each customer to enjoy lower operations expenses. One solution is for a customer to join with a group of users or organizations to share a cloud environment. What is this cloud deployment option called?

- A. Hybrid
- B. Community
- C. Public
- D. Private

Answer: B

Explanation:

The purpose of this idea is to permit multiple customers to figure on joint projects and applications that belong to the community, where it's necessary to possess a centralized clouds infrastructure. In other words, Community Cloud may be a distributed infrastructure that solves the precise problems with business sectors by integrating the services provided by differing types of clouds solutions.

The communities involved in these projects, like tenders, business organizations, and research companies, specialise in similar issues in their cloud interactions. Their shared interests may include concepts and policies associated with security and compliance considerations, and therefore the goals of the project also .

Community Cloud computing facilitates its users to spot and analyze their business demands better. Community Clouds could also be hosted during a data center, owned by one among the tenants, or by a third-party cloud services provider and may be either on- site or off-site.

Community Cloud Examples and Use CasesCloud providers have developed Community Cloud offerings, and a few organizations are already seeing the advantages . the subsequent list shows a number of the most scenarios of the Community Cloud model that's beneficial to the participating organizations.

? Multiple governmental departments that perform transactions with each other can have their processing systems on shared infrastructure. This setup makes it cost- effective to the tenants, and may also reduce their data traffic.

Benefits of Community CloudsCommunity Cloud provides benefits to organizations within the community, individually also as collectively. Organizations don't need to worry about the safety concerns linked with Public Cloud due to the closed user group.

This recent cloud computing model has great potential for businesses seeking cost- effective cloud services to collaborate on joint projects, because it comes with multiple advantages.

Openness and ImpartialityCommunity Clouds are open systems, and that they remove the dependency organizations wear cloud service providers. Organizations are able to do many benefits while avoiding the disadvantages of both public and personal clouds.

? Ensures compatibility among each of its users, allowing them to switch properties

consistent with their individual use cases. They also enable companies to interact with their remote employees and support the utilization of various devices, be it a smartphone or a tablet. This makes this sort of cloud solution more flexible to users' demands.

? Consists of a community of users and, as such, is scalable in several aspects like

hardware resources, services, and manpower. It takes under consideration demand growth, and you simply need to increase the user-base.

Flexibility and ScalabilityHigh Availability and ReliabilityYour cloud service must be ready to make sure the availability of knowledge and applications in the least times. Community Clouds secure your data within the same way as the other cloud service, by replicating data and applications in multiple secure locations to guard them from unforeseen circumstances.

Cloud possesses redundant infrastructure to form sure data is out there whenever and wherever you would like it. High availability and reliability are critical concerns for any sort of cloud solution.

Security and ComplianceTwo significant concerns discussed when organizations believe cloud computing are data security and compliance with relevant regulatory authorities. Compromising each other's data security isn't profitable to anyone during a Community Cloud.

? the power to dam users from editing and downloading specific datasets.

? Making sensitive data subject to strict regulations on who has access to Sharing sensitive data unique to a specific organization would bring harm to all or any the members involved.

? What devices can store sensitive data.

Users can configure various levels of security for his or her data. Common use cases:Convenience and ControlConflicts associated with convenience and control don't arise during a Community Cloud. Democracy may be a crucial factor the Community Cloud offers as all tenants share and own the infrastructure and make decisions collaboratively. This setup allows organizations to possess their data closer to them while avoiding the complexities of a personal Cloud.

Less Work for the IT Department Having data, applications, and systems within the cloud means you are doing not need to manage them entirely. This convenience eliminates the necessity for tenants to use extra human resources to manage the system. Even during a self-managed solution, the work is split among the participating organizations. Environment Sustainability In the Community Cloud, organizations use one platform for all their needs, which dissuades them from investing in separate cloud facilities. This shift introduces a symbiotic relationship between broadening and shrinking the utilization of cloud among clients. With the reduction of organizations using different clouds, resources are used more efficiently, thus resulting in a smaller carbon footprint.

NEW QUESTION 302

- (Topic 2)

Alice needs to send a confidential document to her coworker, Bryan. Their company has public key infrastructure set up. Therefore, Alice both encrypts the message and digitally signs it. Alice uses to encrypt the message, and Bryan uses to confirm the digital signature.

- A. Bryan's public key; Bryan's public key
- B. Alice's public key; Alice's public key
- C. Bryan's private key; Alice's public key
- D. Bryan's public key; Alice's public key

Answer: D

Explanation:

PKI uses public-key cryptography, which is widely used on the Internet to encrypt messages or authenticate message senders. In public-key cryptography, a CA generates public and private keys with the same algorithm simultaneously. The private key is held only by the subject (user, company, or system) mentioned in the certificate, while the public key is made publicly available in a directory that all parties can access. The subject keeps the private key secret and uses it to decrypt the text encrypted by someone else using the corresponding public key (available in a public directory). Thus, others encrypt messages for the user with the user's public key, and the user decrypts it with his/her private key.

NEW QUESTION 305

- (Topic 2)

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. installation
- D. Command and control

Answer: A

Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also. Alternatively, and most ordinarily, the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board, the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a **MUST** in today's quickly evolving landscape of cybersecurity threats

NEW QUESTION 308

- (Topic 2)

A pen tester is configuring a Windows laptop for a test. In setting up Wireshark, what driver and library are required to allow the NIC to work in promiscuous mode?

- A. Libpcap
- B. Awinpcap
- C. Winprom
- D. Winpcap

Answer: D

NEW QUESTION 313

- (Topic 2)

This form of encryption algorithm is asymmetric key block cipher that is characterized by a 128-bit block size, and its key size can be up to 256 bits. Which among the following is this encryption algorithm?

- A. Twofish encryption algorithm
- B. HMAC encryption algorithm
- C. IDEA
- D. Blowfish encryption algorithm

Answer: A

Explanation:

Twofish is an encryption algorithm designed by Bruce Schneier. It's a symmetric key block cipher with a block size of 128 bits, with keys up to 256 bits. It's associated with AES (Advanced Encryption Standard) and an earlier block cipher called Blowfish. Twofish was actually a finalist to become the industry standard for encryption, but was ultimately beaten out by the present AES. Twofish has some distinctive features that set it aside from most other cryptographic protocols. For one, it uses pre-computed, key-dependent S-boxes. An S-box (substitution-box) may be a basic component of any symmetric key algorithm which performs substitution. within the context of Twofish's block cipher, the S-box works to obscure the connection of the key to the ciphertext. Twofish uses a pre-computed, key-dependent S-box which suggests that the S-box is already provided, but depends on the cipher key to decrypt the knowledge.

How Secure is Twofish? Twofish is seen as a really secure option as far as encryption protocols go. One among the explanations that it wasn't selected because the advanced encryption standard is thanks to its slower speed. Any encryption standard that uses a 128-bit or higher key, is theoretically safe from brute force attacks. Twofish is during this category. Because Twofish uses pre-computed key-dependent S-boxes, it are often susceptible to side channel attacks. This is often thanks to the tables being pre-computed. However, making these tables key-dependent helps mitigate that risk. There are a couple of attacks on Twofish, but consistent with its creator, Bruce Schneier, it didn't constitute a real cryptanalysis. These attacks didn't constitute a practical break within the cipher.

Products That Use Twofish
GnuPG: GnuPG may be a complete and free implementation of the OpenPGP standard as defined by RFC4880 (also referred to as PGP). GnuPG allows you to encrypt and sign your data and communications; it features a flexible key management system, along side access modules for all types of public key directories.
KeePass: KeePass may be a password management tool that generates passwords with top-notch security. It's a free, open source, lightweight and easy-to-use password manager with many extensions and plugins.
Password Safe: Password Safe uses one master password to stay all of your passwords protected, almost like the functionality of most of the password managers on this list. It allows you to store all of your passwords during a single password database, or multiple databases for various purposes. Creating a database is straightforward, just create the database, set your master password.
PGP (Pretty Good Privacy): PGP is employed mostly for email encryption, it encrypts the content of the e-mail. However, Pretty Good Privacy doesn't encrypt the topic and sender of the e-mail, so make certain to never put sensitive information in these fields when using PGP.
TrueCrypt: TrueCrypt may be a software program that encrypts and protects files on your devices. With TrueCrypt the encryption is transparent to the user and is completed locally at the user's computer. This suggests you'll store a TrueCrypt file on a server and TrueCrypt will encrypt that file before it's sent over the network.

NEW QUESTION 316

- (Topic 2)

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection
- D. Net use

Answer: A

NEW QUESTION 318

- (Topic 2)

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

Answer: B

NEW QUESTION 319

- (Topic 2)

What is the algorithm used by LM for Windows 2000 SAM?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 323

- (Topic 2)

Attacker Rony installed a rogue access point within an organization's perimeter and attempted to intrude into its internal network. Johnson, a security auditor, identified some unusual traffic in the internal network that is aimed at cracking the authentication mechanism. He immediately turned off the targeted network and tested for any weak and outdated security mechanisms that are open to attack. What is the type of vulnerability assessment performed by Johnson in the above scenario?

- A. Distributed assessment
- B. Wireless network assessment
- C. Host-based assessment
- D. Application assessment

Answer: B

Explanation:

Wireless network assessment determines the vulnerabilities in an organization's wireless networks. In the past, wireless networks used weak and defective data encryption mechanisms. Now, wireless network standards have evolved, but many networks still use weak and outdated security mechanisms and are open to attack. Wireless network assessments try to attack wireless authentication mechanisms and gain unauthorized access. This type of assessment tests wireless networks and identifies rogue networks that may exist within an organization's perimeter. These assessments audit client-specified sites with a wireless network. They sniff wireless network traffic and try to crack encryption keys. Auditors test other network access if they gain access to the wireless network.

Expanding your network capabilities are often done well using wireless networks, but it also can be a source of harm to your data system. Deficiencies in its implementations or configurations can allow it to be accessed in an unauthorized manner. This makes it imperative to closely monitor your wireless network while also conducting periodic Wireless Network assessment. It identifies flaws and provides an unadulterated view of exactly how vulnerable your systems are to malicious and unauthorized accesses. Identifying misconfigurations and inconsistencies in wireless implementations and rogue access points can improve your security posture and achieve compliance with regulatory frameworks.

NEW QUESTION 326

- (Topic 2)

Emily, an extrovert obsessed with social media, posts a large amount of private information, photographs, and location tags of recently visited places. Realizing this, James, a professional hacker, targets Emily and her acquaintances, conducts a location search to detect their geolocation by using an automated tool, and gathers information to perform other sophisticated attacks. What is the tool employed by James in the above scenario?

- A. ophcrack
- B. Hootsuite
- C. VisualRoute
- D. HULK

Answer: B

Explanation:

Hootsuite may be a social media management platform that covers virtually each side of a social media manager's role.

With only one platform users area unit ready to do the easy stuff like reverend cool content and schedule posts on social media in all the high to managing team members and measure ROI.

There area unit many totally different plans to decide on from, from one user set up up to a bespoke enterprise account that's appropriate for much larger organizations.

Conducting location search on social media sites such as Twitter, Instagram, and Facebook helps attackers to detect the geolocation of the target. This information further helps attackers to perform various social engineering and non-technical attacks. Many online tools such as Followerwonk, Hootsuite, and Sysomos are available to search for both geotagged and non-geotagged information on social media sites. Attackers search social media sites using these online tools using keywords, usernames, date, time, and so on...

NEW QUESTION 327

- (Topic 2)

What piece of hardware on a computer's motherboard generates encryption keys and only releases a part of the key so that decrypting a disk on a new piece of hardware is not possible?

- A. CPU
- B. GPU
- C. UEFI
- D. TPM

Answer: D

Explanation:

The TPM is a chip that's part of your computer's motherboard — if you bought an off-the-shelf PC, it's soldered onto the motherboard. If you built your own computer, you can buy one as an add-on module if your motherboard supports it. The TPM generates encryption keys, keeping part of the key to itself

NEW QUESTION 329

- (Topic 2)

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

Explanation:

<https://en.wikipedia.org/wiki/Phishing>

Phishing is a type of social engineering attack often used to steal user data, including login credentials and credit card numbers. It occurs when an attacker, masquerading as a trusted entity, dupes a victim into opening an email, instant message, or text message. The recipient is then tricked into clicking a malicious link, which can lead to the installation of malware, the freezing of the system as part of a ransomware attack, or the revealing of sensitive information.

An attack can have devastating results. For individuals, this includes unauthorized purchases, the stealing of funds, or identity theft.

Moreover, phishing is often used to gain a foothold in corporate or governmental networks as a part of a larger attack, such as an advanced persistent threat (APT) event. In this latter

scenario, employees are compromised in order to bypass security perimeters, distribute malware inside a closed environment, or gain privileged access to secured data.

An organization succumbing to such an attack typically sustains severe financial losses in addition to declining market share, reputation, and consumer trust.

Depending on the scope, a phishing attempt might escalate into a security incident from which a business will have a difficult time recovering.

NEW QUESTION 331

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v13 Practice Exam Features:

- * 312-50v13 Questions and Answers Updated Frequently
- * 312-50v13 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v13 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v13 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v13 Practice Test Here](#)