


UiPath-ADPv1 Dumps


UiPath (ADPv1) Automation Developer Professional Exam

<https://www.certleader.com/UiPath-ADPv1-dumps.html>

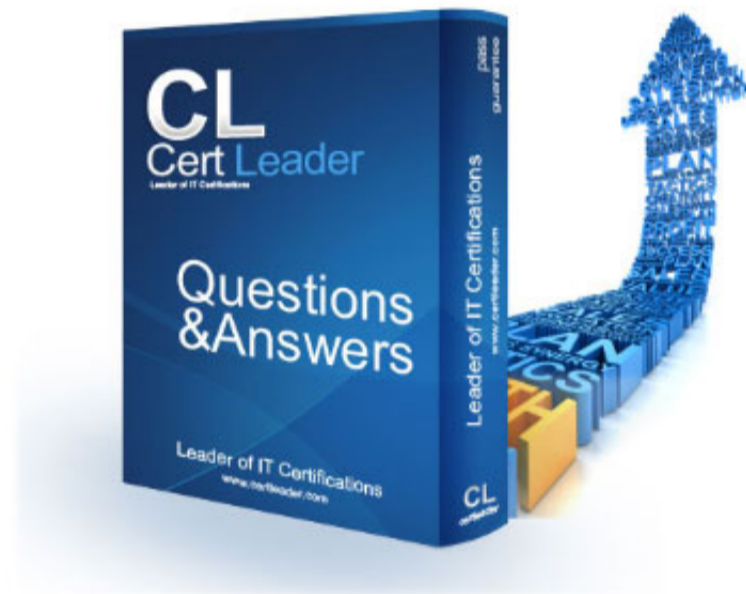

NEW QUESTION 1

While working in an RPA testing project, you encountered the following activity in one of the workflows included in the project.

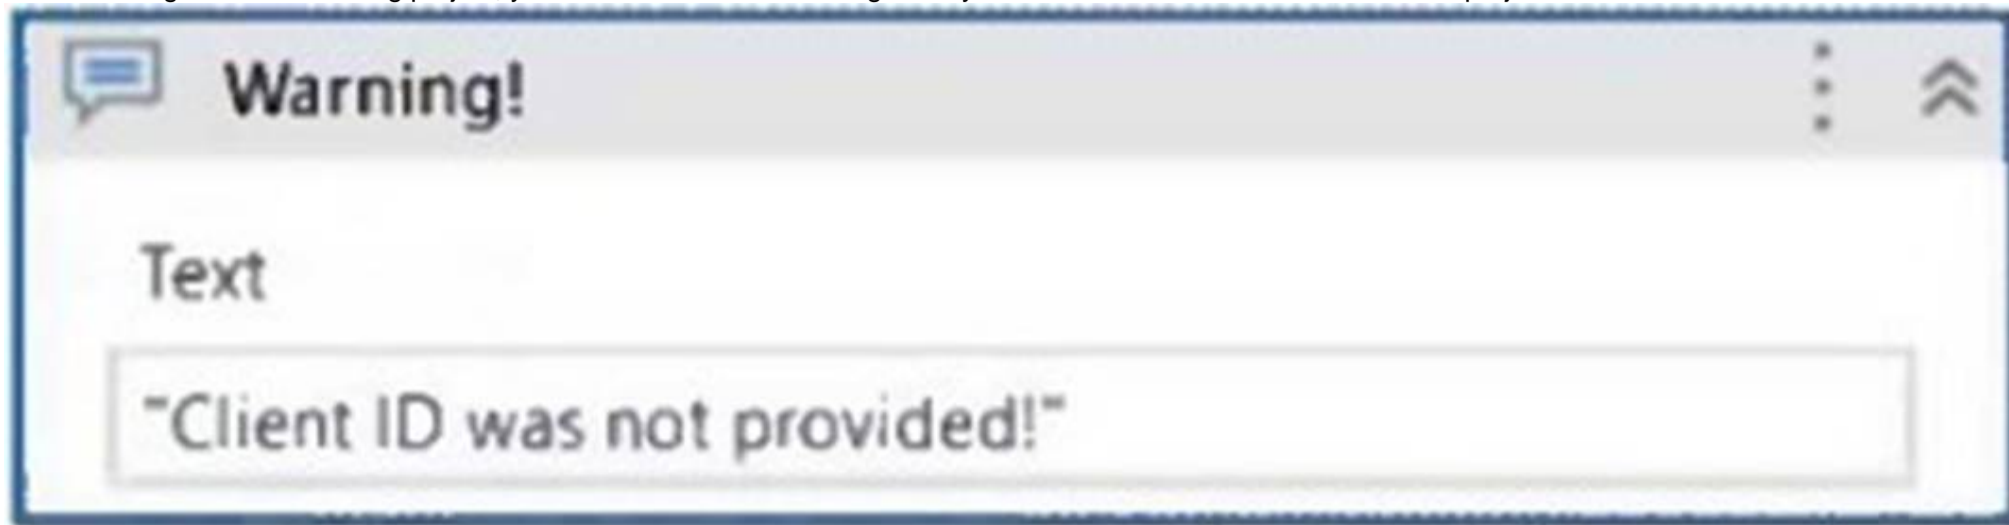


What action can you perform in your mocked file to replace the functionality of the MessageBox with a LogMessage during mock testing?

- A. Synchronize mock.
- B. Create mock workflow.
- C. Surround activity with mock.
- D. Remove mock activity.

Answer: C

NEW QUESTION 2

A developer wants to add items to a list of strings using the Invoke Method activity. The list is declared as follows:

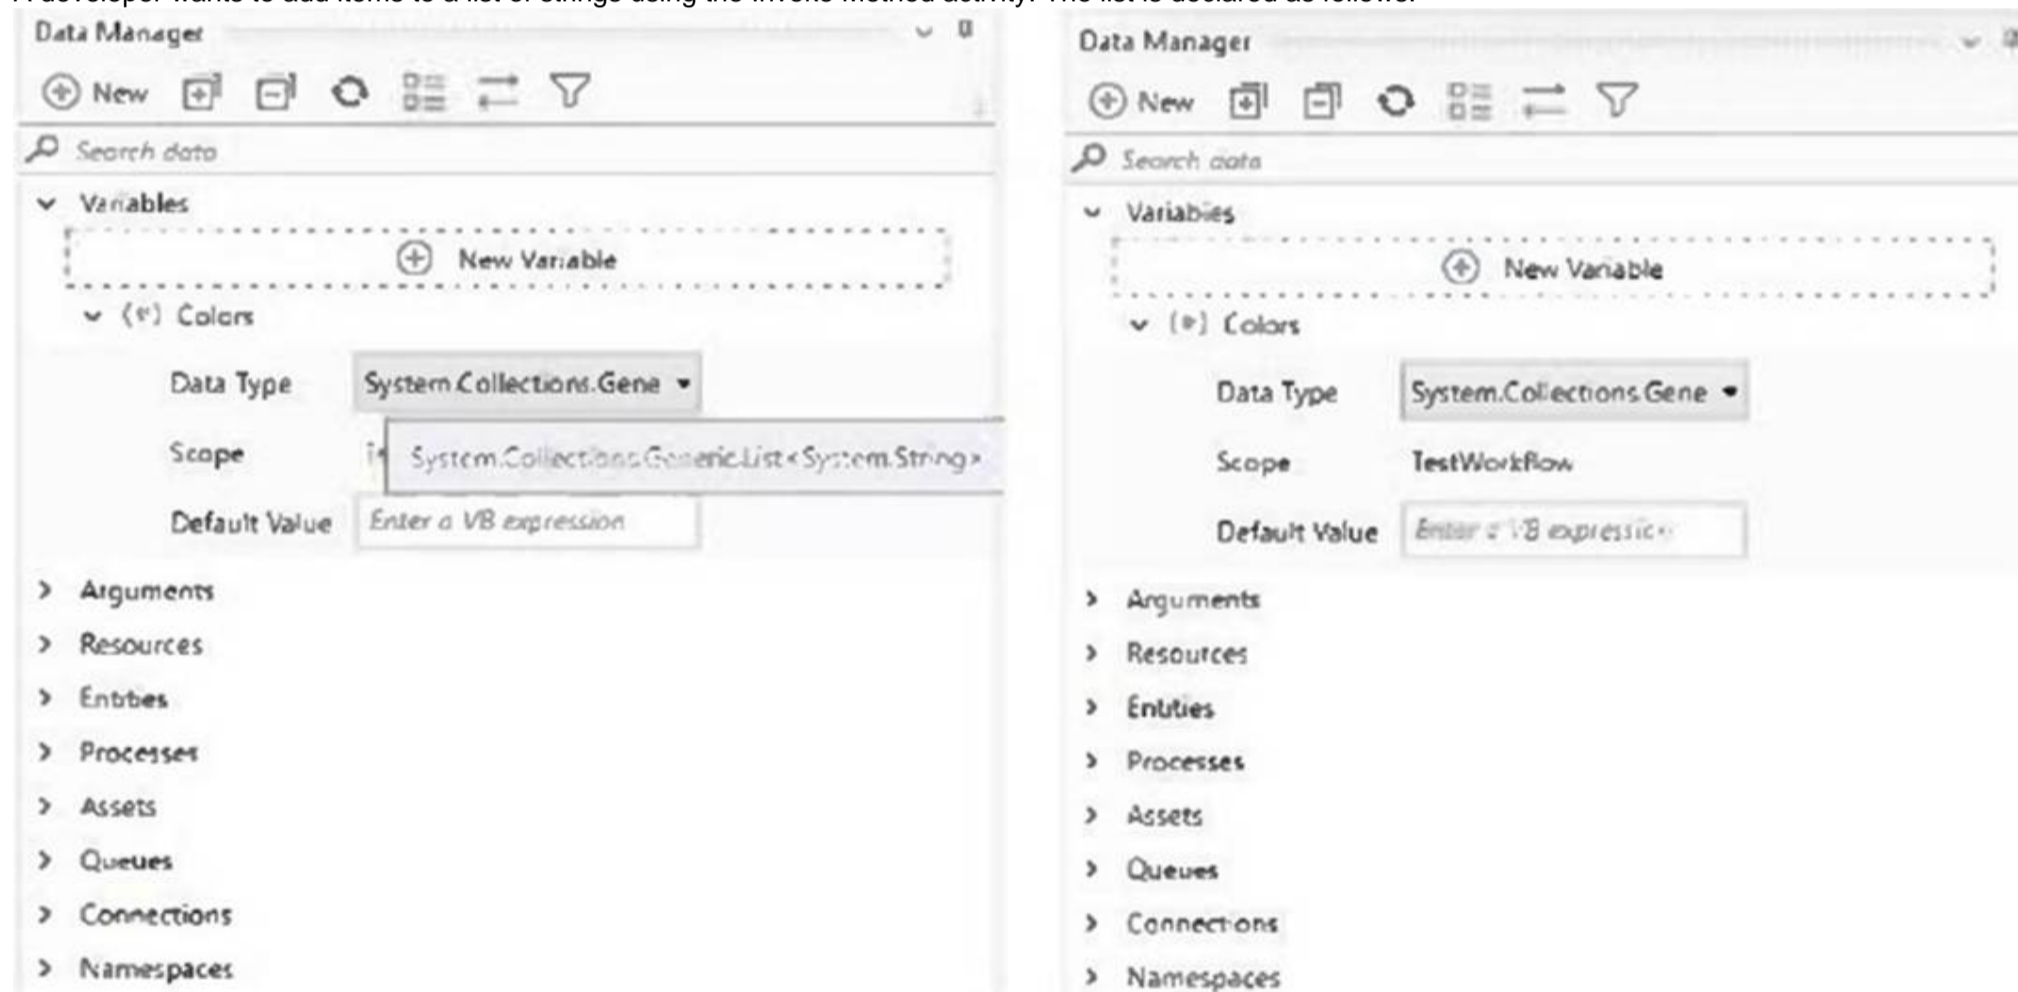

The Invoke Method activity has the following properties:

System.Activities.Statements.InvokeMethod

Common

DisplayName

Invoke Method

Misc

GenericTypeArguments

(Collection)

MethodName

Add

Parameters

(Collection)

Private

Result

Enter a VB expression

RunAsynchronously

TargetObject

Colors

TargetType

(null)

The Parameters property is as follows:

Direction	Type	Value
In	String	"Yellow"
<i>Create Argument</i>		

Based on the information shown in the exhibits what is the outcome of the Invoke Method activity?

- A. An exception will be thrown.
- B. Colors will contain an item with the value "Yellow".
- C. Colors will contain an item with an empty value.
- D. Colors will contain an item with the value "Colors: Yellow".

Answer: B

NEW QUESTION 3

What distinguishes the Settings sheet from the Assets sheet in the "Config.xlsx" file?

- A. Settings sheet contains only values used for the initialization of application
- B. Assets sheet contains only Credential Assets stored in Orchestrator.
- C. Settings sheet contains hard-coded value
- D. Assets sheet contains all names of Orchestrator Assets including those of type Credential.
- E. Settings sheet contains hard-coded value
- F. Assets sheet contains all names of Orchestrator Assets except those of type Credential.
- G. Settings sheet contains Credential Assets stored in Orchestrator
- H. Assets sheet contains hard-coded values.

Answer: B

NEW QUESTION 4

What is created automatically when you create a coded automation in UiPath?

- A. A namespace using the name of the Studio project.
- B. A new activity package with the name of the Studio project.
- C. A helper class using the name of the Studio project.
- D. A folder with the name of the Studio project.

Answer: A

NEW QUESTION 5

In UiPath Studio, how can a specific amount of time be subtracted from the current date using DateTime and TimeSpan variables in the VB.NET?

- A. Multiply the TimeSpan variable by -1 and then add it to the DateTime variable.
- B. Assign the subtraction result to a DateTime variable with the following syntax Today.Subtract(Span).
- C. Use the Add method on the DateTime variable and pass a negative TimeSpan value.
- D. Call Now.Subtract(Span) directly, without using a DateTime variable.

Answer: C

NEW QUESTION 6

Which one of the following expressions is the equivalent of the If activity from the picture?

The screenshot shows a UiPath workflow editor with the following structure:


- Decision Block:** Titled "If number is even".
 - Condition:** `number mod 2 = 0`
 - Then Branch:** Contains a "Sequence" block with one activity: "Assign message - even". The variable `message` is assigned the value `"Even number"`.
 - Else Branch:** Contains a "Sequence" block with one activity: "Assign message - Odd". The variable `message` is assigned the value `"Odd number"`.

- A. `message = If(number mod 2 = 0. "Even number", "Odd number")`
- B. `message = If(number mod 2 = 0. Odd numbe`
- C. `Even number)`
- D. `message = If(number mod 2 = 0 then "Odd number" else "Even number")`
- E. `message = If(number mod 2 = 0 {"Odd number"} else {"Even number"})`

Answer: A

NEW QUESTION 7

Given the following workflow:

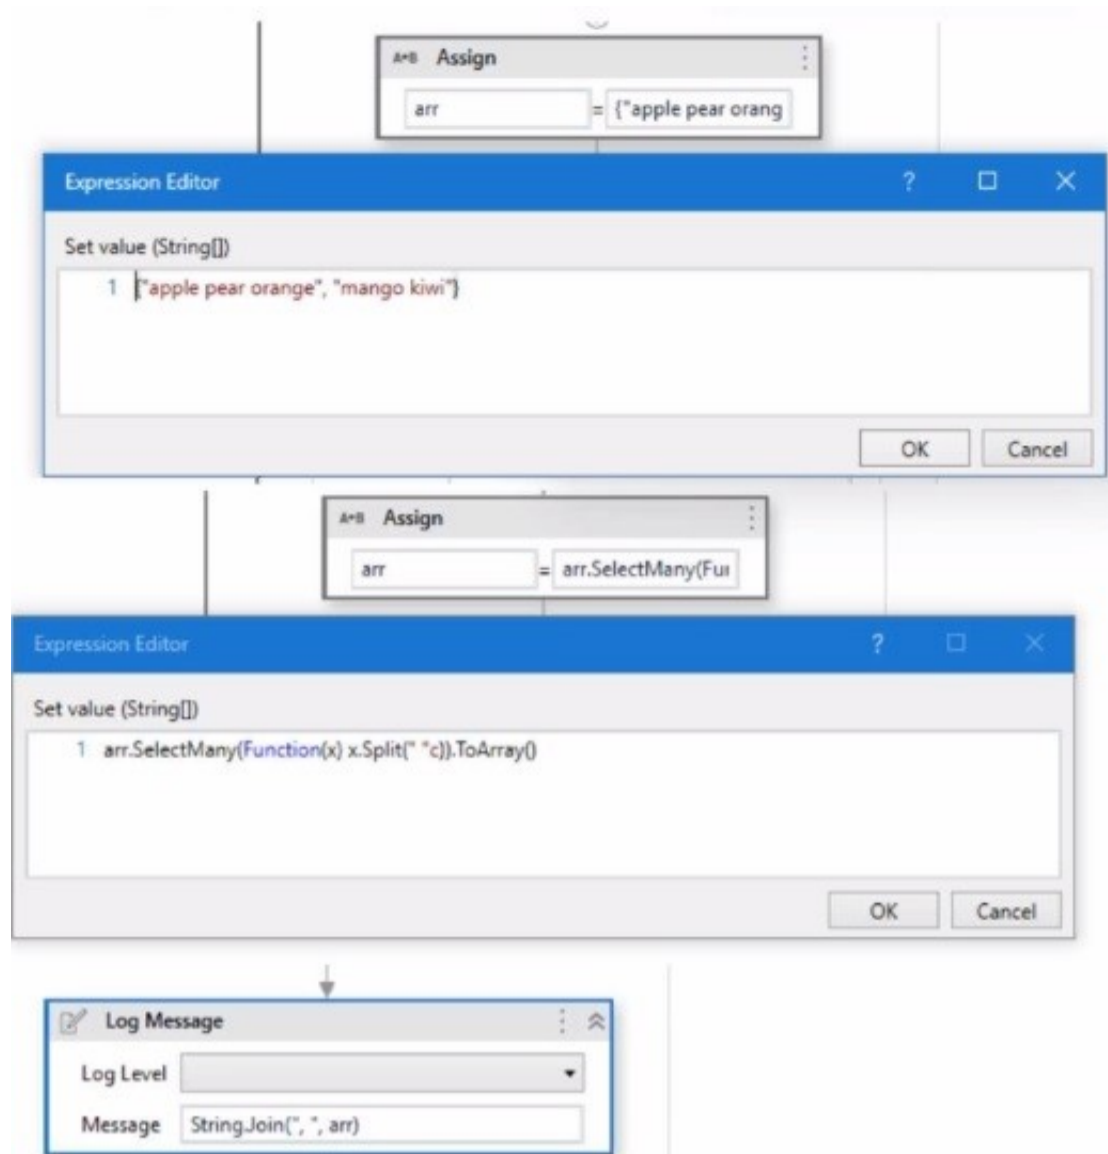

What will be the output of the Log Message activity?

- A. apple, pear, orange
- B. apple, pear, orange, mango, kiwi
- C. "apple pear orange", "mango kiwi"
- D. apple pear orange, mango kiwi

Answer: B

NEW QUESTION 8

What role do Triggers play in the UiPath Integration Service?

- A. Provide a mechanism for subscribing to specific events from third-party applications, automatically starting processes in Orchestrator.
- B. Assist in the creation of automation projects by providing event-based activities.
- C. Manage connections between UiPath Studio and third-party applications.
- D. Provide a mechanism for starting processes on a scheduled basis from Orchestrator.

Answer: A

NEW QUESTION 9

In which of the following places can you access a recording of a failed queue transaction in UiPath Orchestrator?

- A. In the job details window of the process that contains the failed transaction.
- B. In the Logs page of the queue transaction.
- C. In the contextual menu of the failed transaction, by clicking Open recording.
- D. In the queue transaction list view, by hovering over the transaction status.

Answer: C

NEW QUESTION 10

Which are the actions that can be done in Test Explorer?

- A. Export test data, group tests together, analyze activity coverage.
- B. Perform debugging, analyze activity coverage, group tests together.
- C. Export test results, group tests together, analyze activity coverage.
- D. Export test data, perform debugging, analyze activity coverage.

Answer: C

NEW QUESTION 10

A developer has created a string array variable as shown below: UserNames = {"Jane", "Jack", "Jill", "John"}
Which expression should the developer use in a Log Message activity to print the elements of the array separated by the string ","?

- A. String.Concat(UserNames, ",")

- B. String.Join(UserNames, ", ")
- C. String.Join(", ", UserNames)
- D. String.Concat(", ", UserNames)

Answer: C

NEW QUESTION 13

What are the two types of events supported by Integration Service?

- A. Local and Remote.
- B. Scheduled and Unscheduled
- C. Generic and Predefined.
- D. Basic and Advanced.

Answer: C

NEW QUESTION 18

In a UiPath development scenario, which type of process design would be the most appropriate for an automation task that executes actions in a straightforward progression without iteration or branching?

- A. Transactional Process
- B. Iterative Process
- C. Sequential Process
- D. Linear Process

Answer: C

NEW QUESTION 23

Where is the TransactionNumber incremented in the REFramework?

- A. Only in the RetryCurrentTransaction.xaml workflow.
- B. Only in the SetTransactionStatus.xaml workflow.
- C. In the New Transaction transition.
- D. In the RetryCurrentTransaction.xaml workflow and in the SetTransactionStatus.xaml workflow.

Answer: B

NEW QUESTION 26

Once "Library A" has been imported as a dependency in the current project, how can the UI Object Repository defined in "Library A" be accessed?

- A. The Object Repository will automatically be available in the Process.
- B. The Object Repository needs to be exported as a UI Library and imported in the Process for it to become available.
- C. The Object Repository is only available in a Library.
- D. The Object Repository cannot be passed between a Process and a Library.

Answer: A

NEW QUESTION 28

Consider testing a workflow that computes the sum of two numbers having the data driven test data from the Excel file below:

Number1	Number2	Sum
1	2	3
2	2	4
5	4	9

Expanding the functionality of the workflow to compute the sum of three numbers, the data needs to be updated as well to accommodate the new scenario:

Number1	Number2	Number3	Sum
1	2	2	5
2	2	3	7
5	4	1	10

What are steps to do that?

- A. Click Right on the Test Case and select Update Test Data
- B. Click Right on the Test Case and select Add Test Data.
- C. Click Right on the Test Case and select Refresh Test Data
- D. Click Right on the Test Case and select Remove Test Data.

Answer: C

NEW QUESTION 30

While developing a test case using UiPath.Testing.Activities, which testing activity enables to include another activity within its body?

- A. Verify Expression With Operator
- B. Verify Range
- C. Verify Control Attribute
- D. Verify Expression

Answer: D

NEW QUESTION 35

What is the functionality of the Include Subfolders filter in the Monitoring pages when a modern folder is selected?

- A. It allows you to choose between background and foreground processes for the displayed data.
- B. It allows you to select whether the contents of the selected folder's subfolders are displayed.
- C. It enables you to sort the displayed data based on job priorities.
- D. It allows you to allocate licenses per machine for the displayed data.

Answer: B

NEW QUESTION 38

Considering a process developed using REFramework, if the status of a transaction was set to "Failed" with the ErrorType specified as "Business", the process will transition to which state?

- A. End Process
- B. Initialization
- C. Get Transaction Data
- D. Process Transaction

Answer: C

NEW QUESTION 39


Which of the following statements correctly illustrates using LINO to process data in a UiPath project?

- A. Utilizing LINQ to find the total sum of integers in a list by writing `listOfIntegers.Sum(Function(x) x)`.
- B. Applying LINO to filter out emails in a list of strings containing multiple email addresses by writing `listOfStrings.FilterEmails().ToList()`
- C. Employing LINO to convert DataTable to JSON format by writing `dataTable.ToJSONf)`
- D. Using LINQ to identify the longest string in a list of strings by writing `listOfStrings.Max(Function(x) x.Length)`


Answer: A

NEW QUESTION 41

Assume we have the Verify Expression with Operator activity from the UiPath. Testing.Activities package with the properties configured as follows:

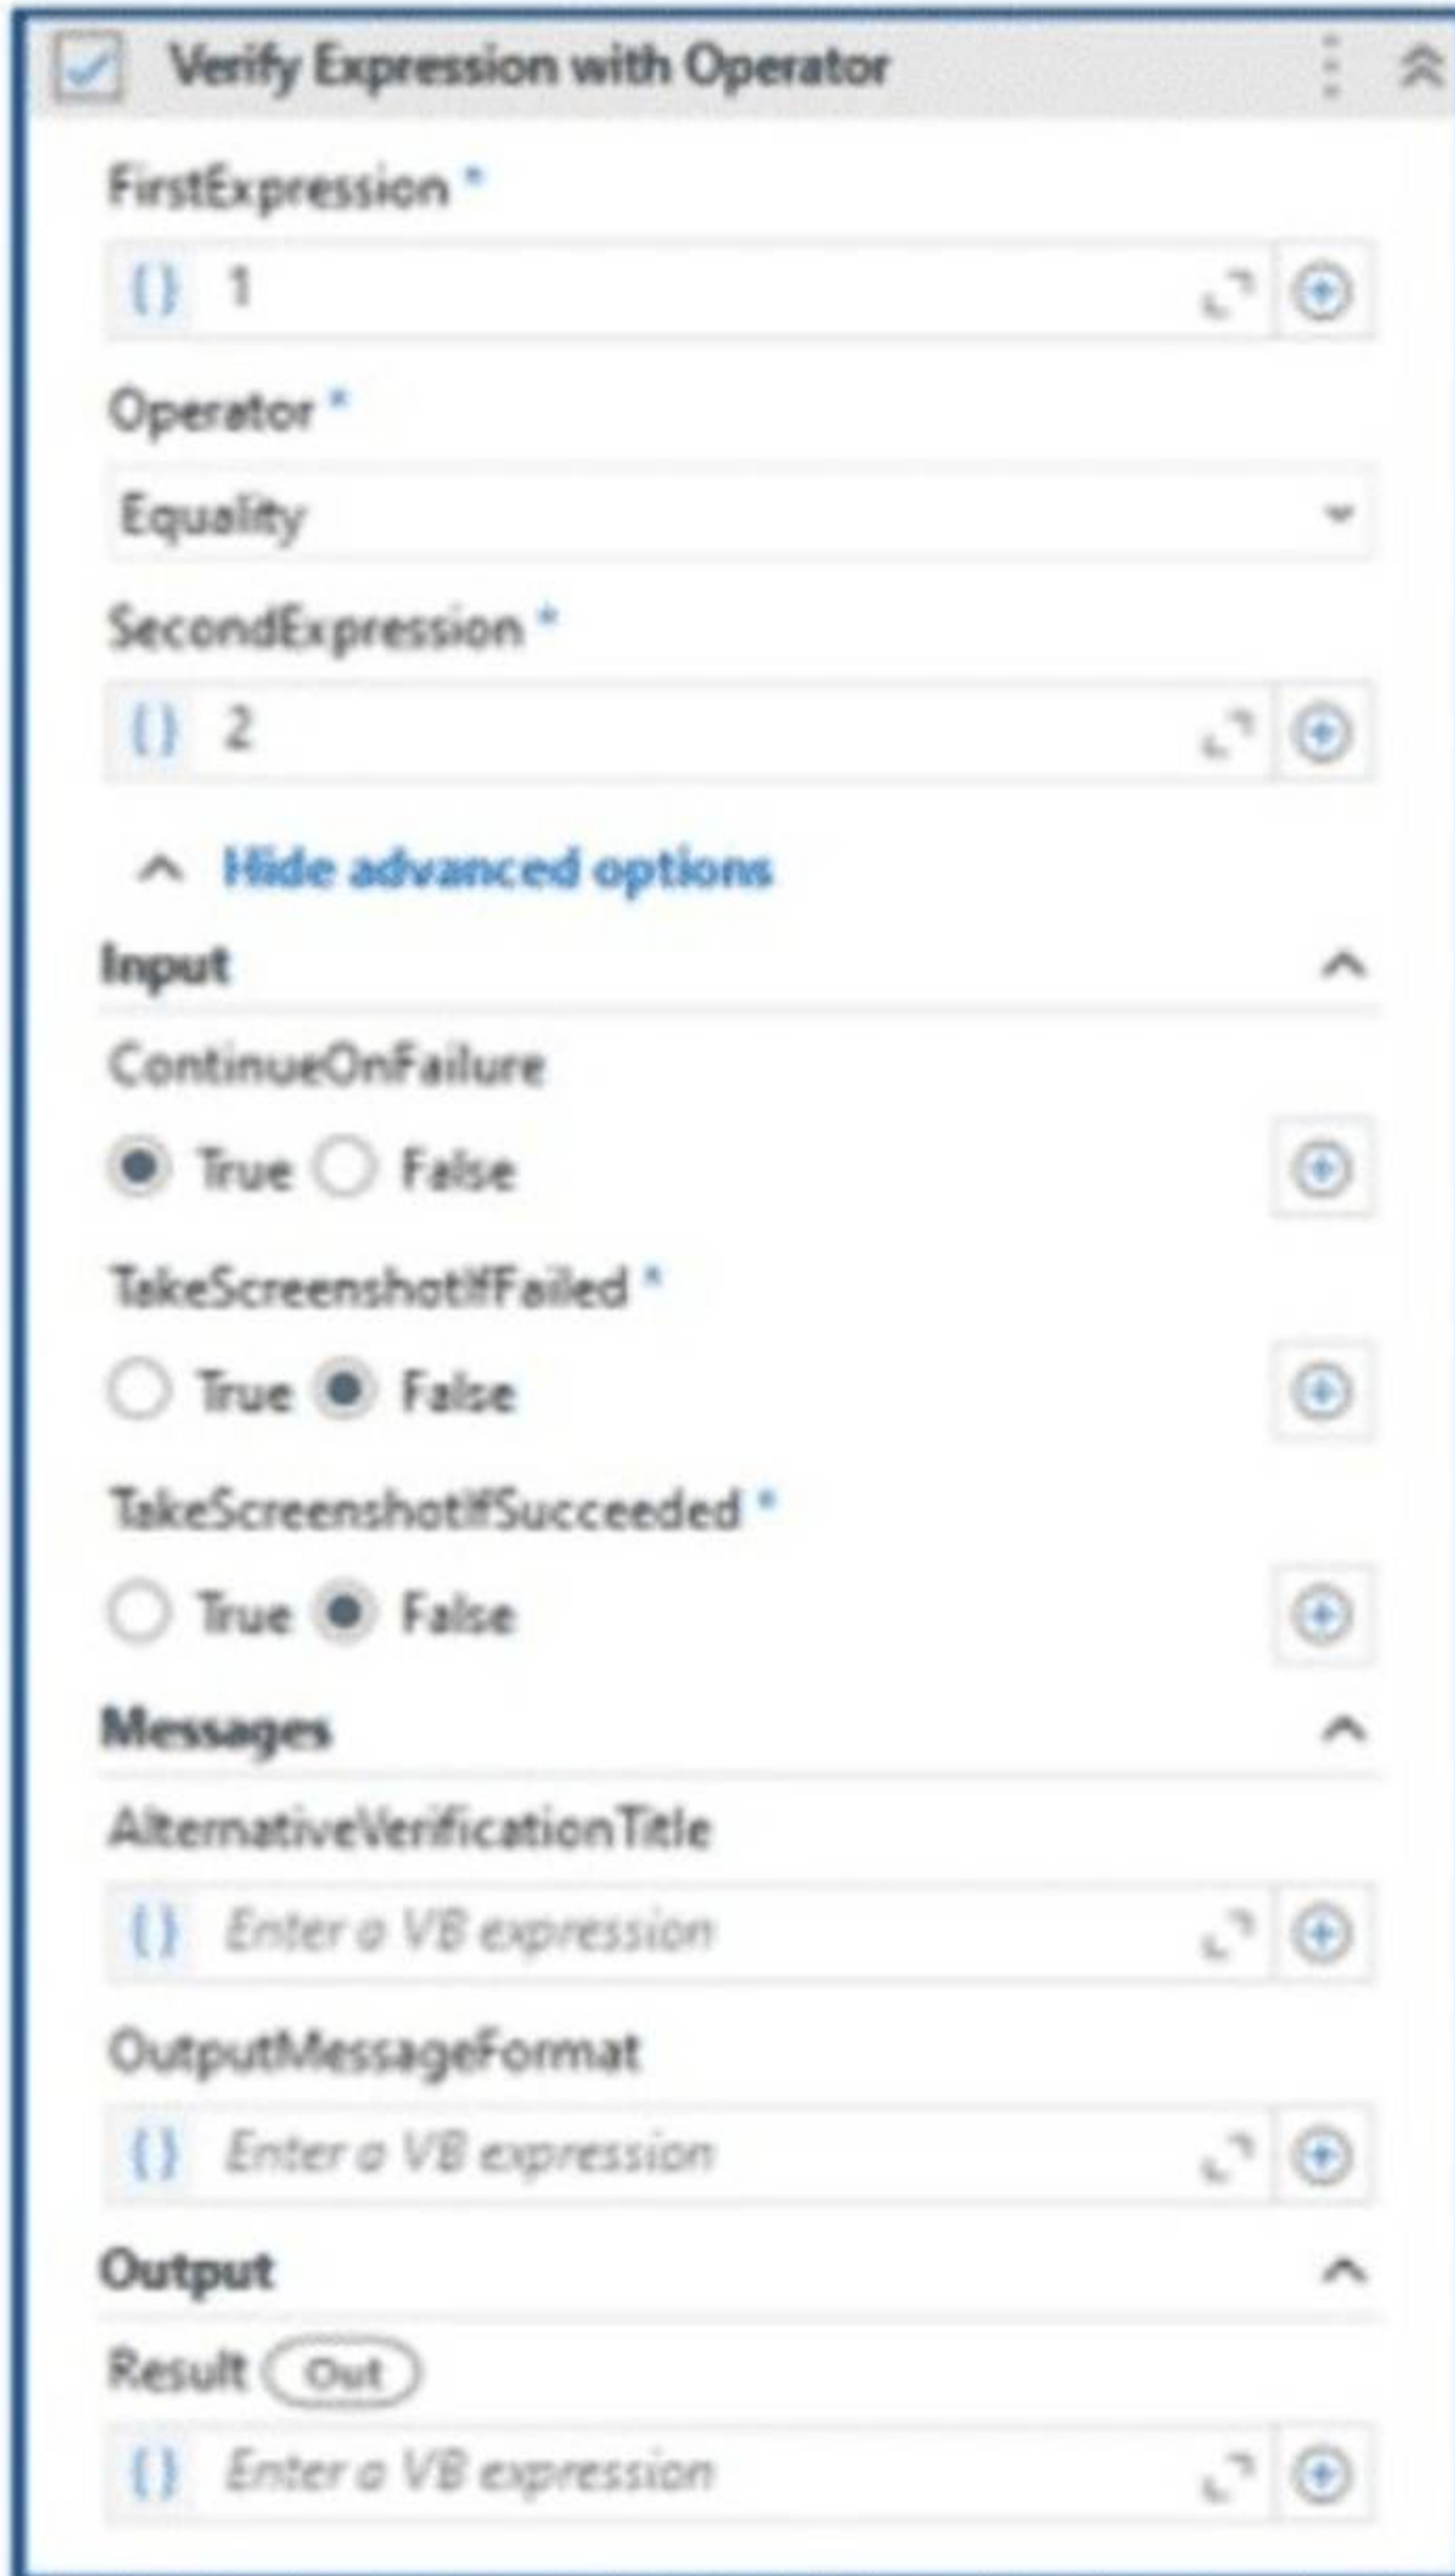

The activity is used within a Try-Catch activity. The Catch block is set to System.Exception and UiPath.Testing.Exception.TestingActivitiesException as shown in the screenshot below:

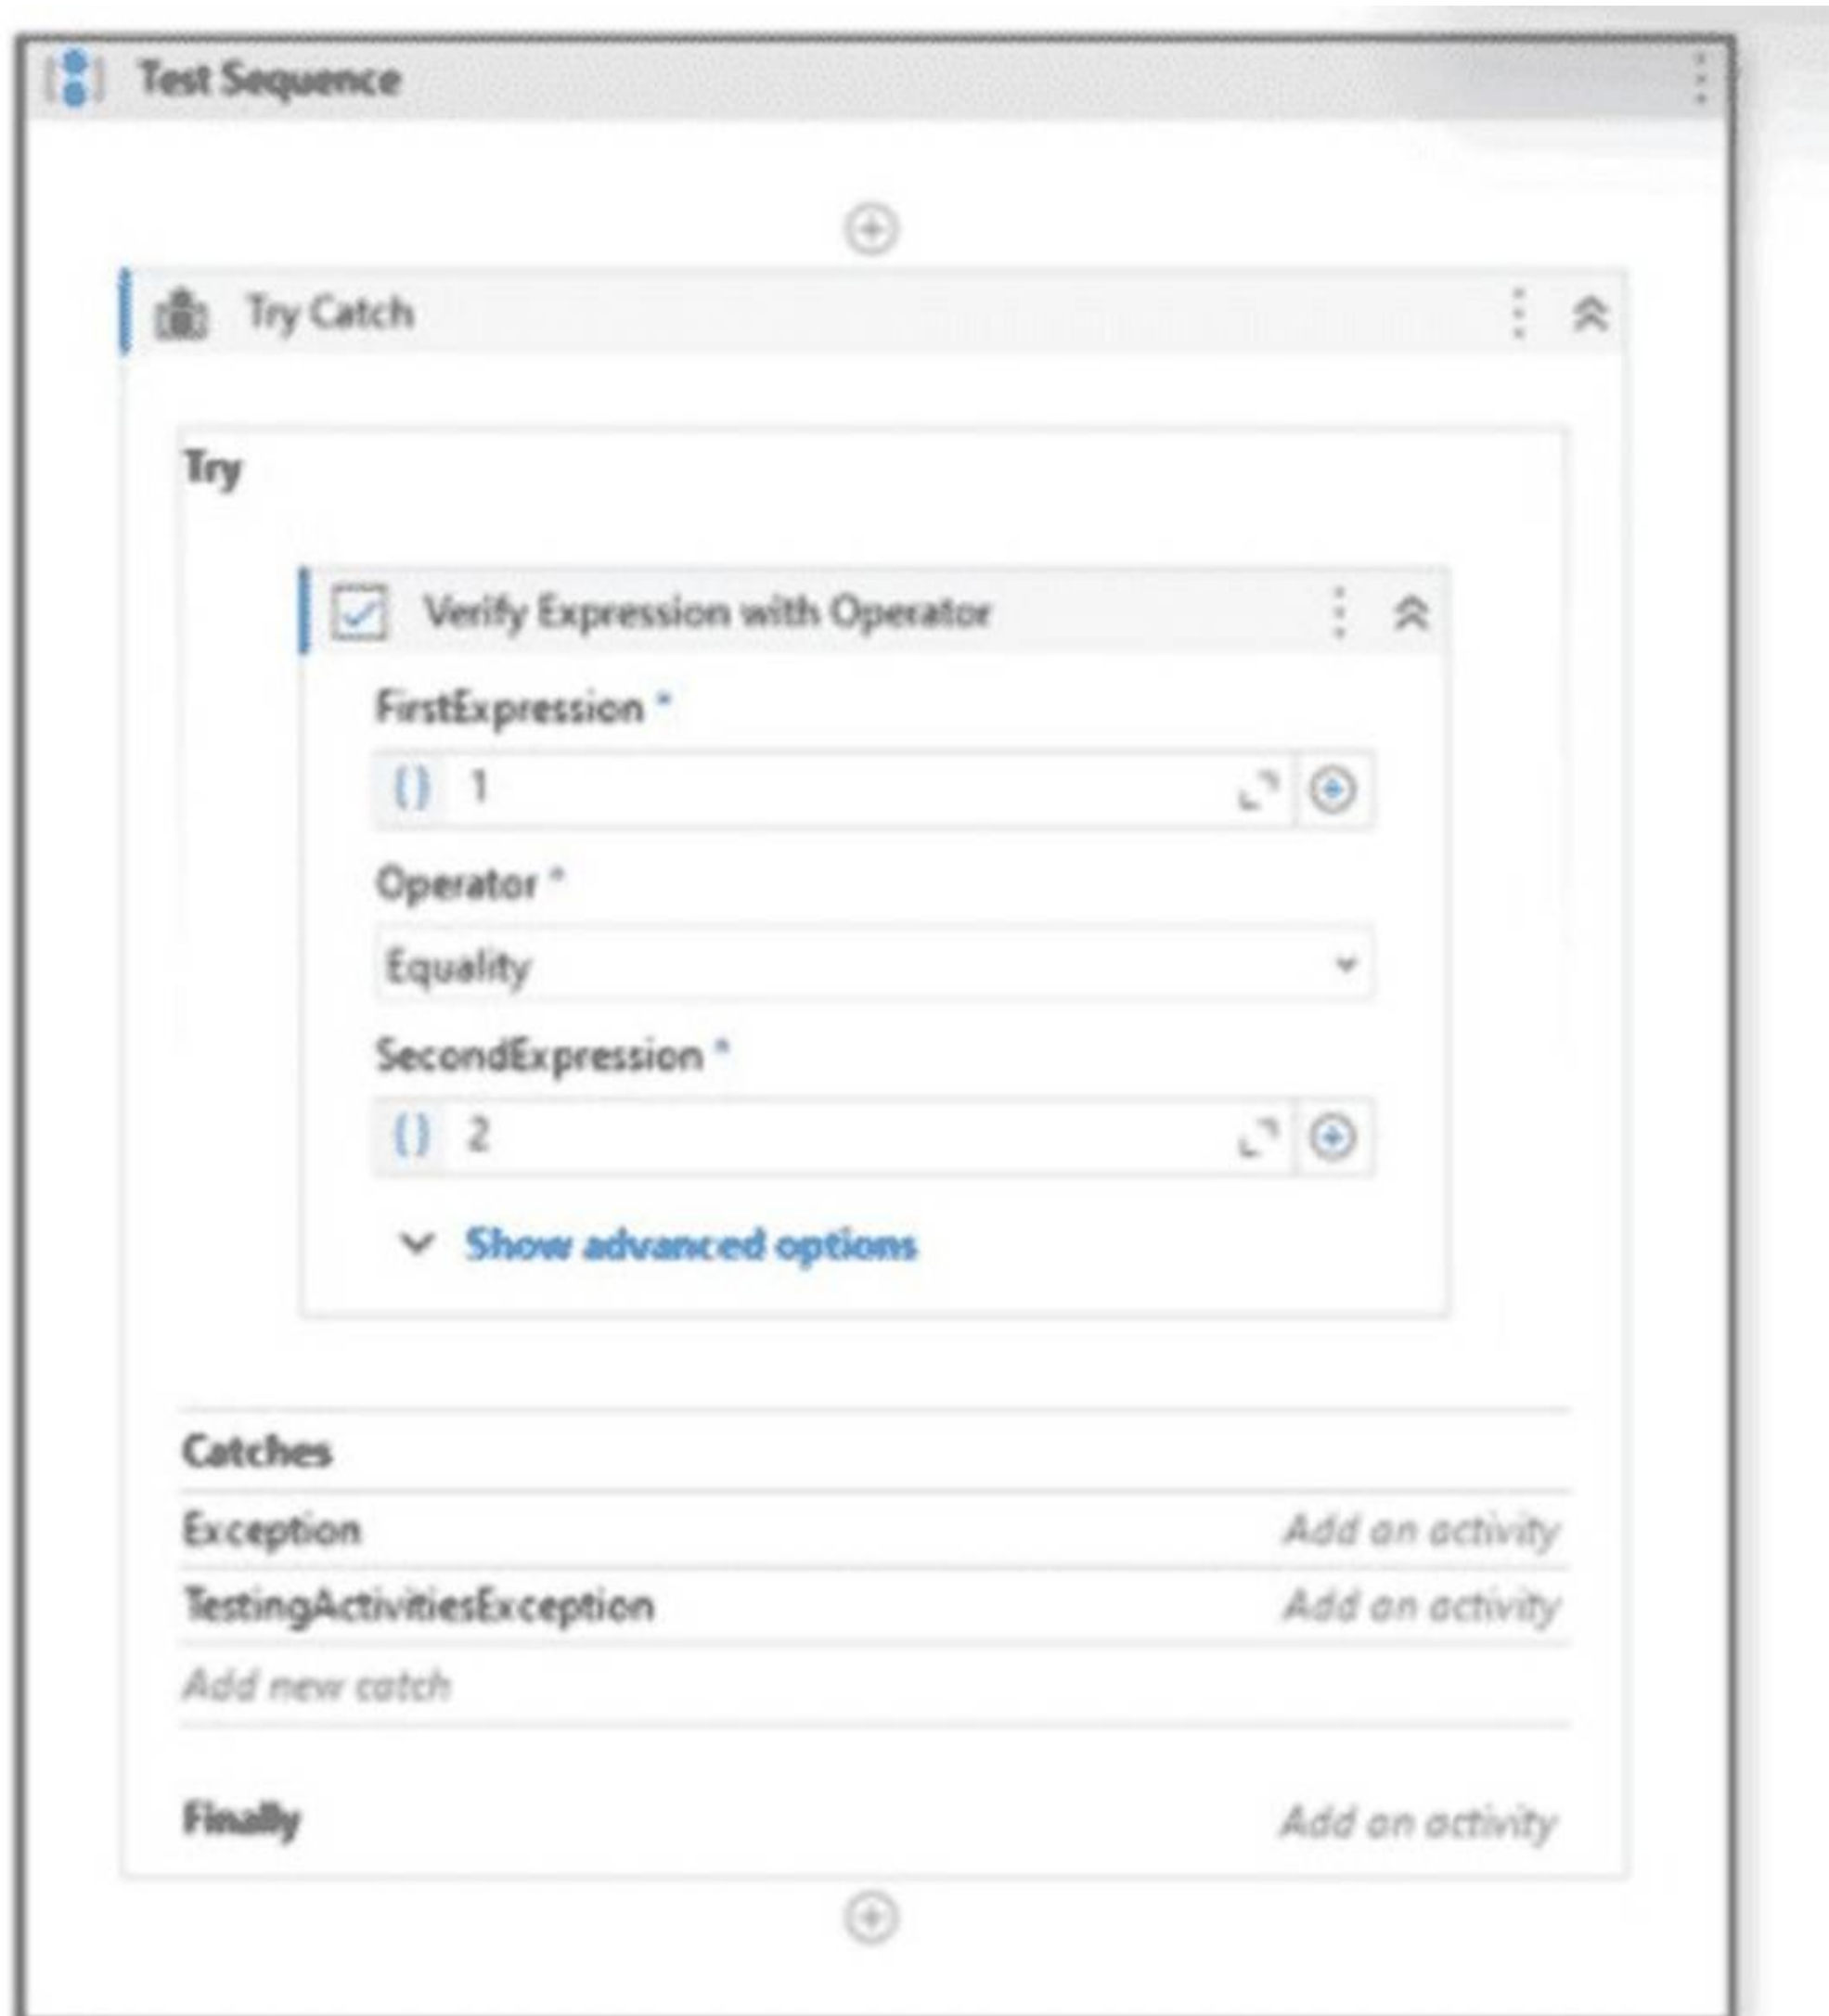

During the execution of the sequence shown above, which block from the Try-Catch activity will be entered first, after the Verify Expression with Operator activity is executed?

- A. None of the other blocks within the Try-Catch activity will be executed.
- B. The Finally block within the Try-Catch activity.
- C. The Exception sequence from the Catches block within the Try-Catch activity.
- D. The TestingActivitiesException sequence from the Catches block within the Try-Catch activity.

Answer: C

NEW QUESTION 44

At indication time, the Strict Selector has the following functionalities available:

- A. Refresh, Open in UiExplorer, Copy to clipboard.
- B. Ignore tex
- C. Copy to clipboar
- D. Show all matches.
- E. Open in UiExplorer, Copy to clipboard, Show all matches.
- F. Accuracy, Open in UiExplorer, Copy to clipboar

G. Show all matches.

Answer: C

NEW QUESTION 47

What can be verified in the InitAllSettingsTestCase test case?

- A. Verify If a certain application is open in the execution environment.
- B. Verify the naming of a certain key present in the 'Config' dictionary.
- C. Verify the variable type for the 'Config' dictionary.
- D. Verify If a certain key is present in the 'Config' dictionary.

Answer: D

Explanation:

In the InitAllSettingsTestCase test case, one of the verifications that can be done is to check if a certain key is present in the 'Config' dictionary. This ensures that necessary configurations are available for the process.

NEW QUESTION 49


Why is it necessary to add the UiPath virtual channel to the allow list policy for Citrix Virtual Apps and Desktops 7 2109?

- A. Because the UiPath Remote Runtime component should be enabled to access the Citrix workspace environment.
- B. Because custom virtual channels are blocked by default, preventing the UiPath Remote Runtime from functioning correctly
- C. Because the network latency should be decreased and the performance of UiPath automation processes on Citrix should be improved.
- D. Because a secure connection should be created between the UiPath Remote Runtime and the Citrix receiver


Answer: B

NEW QUESTION 50

Given the following conditional breakpoint with count = 0

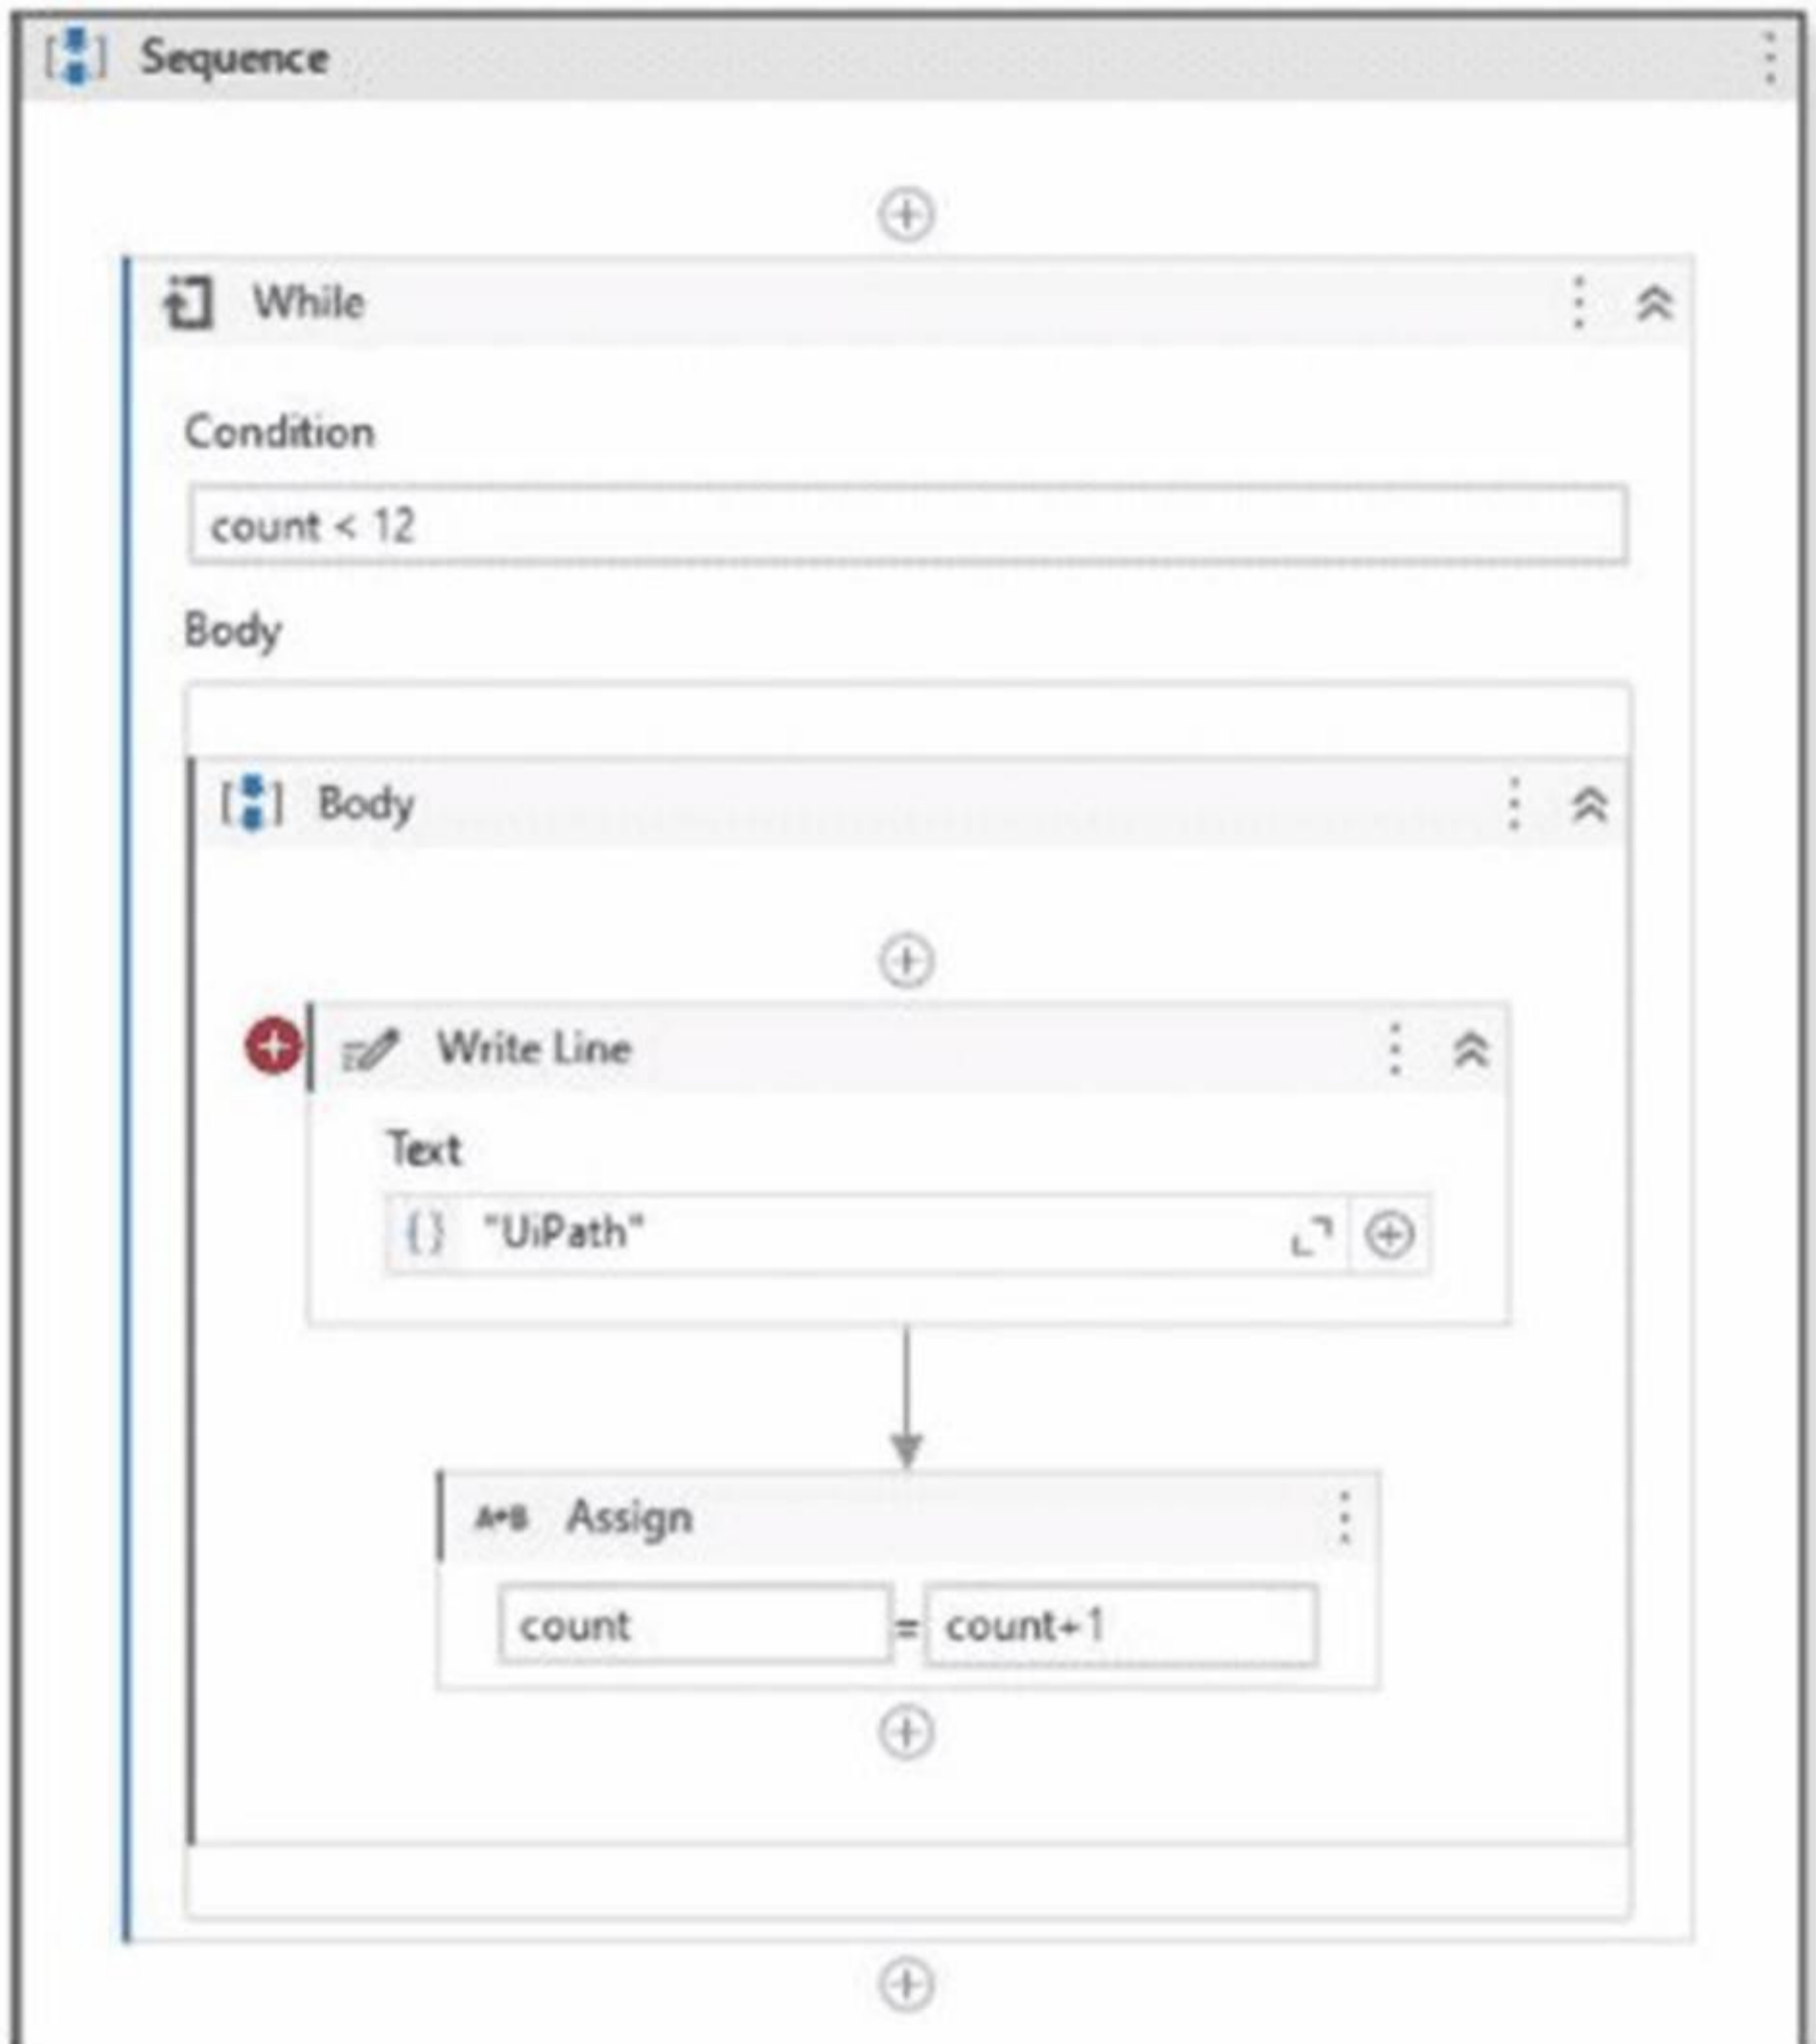

Conditional breakpoint settings:

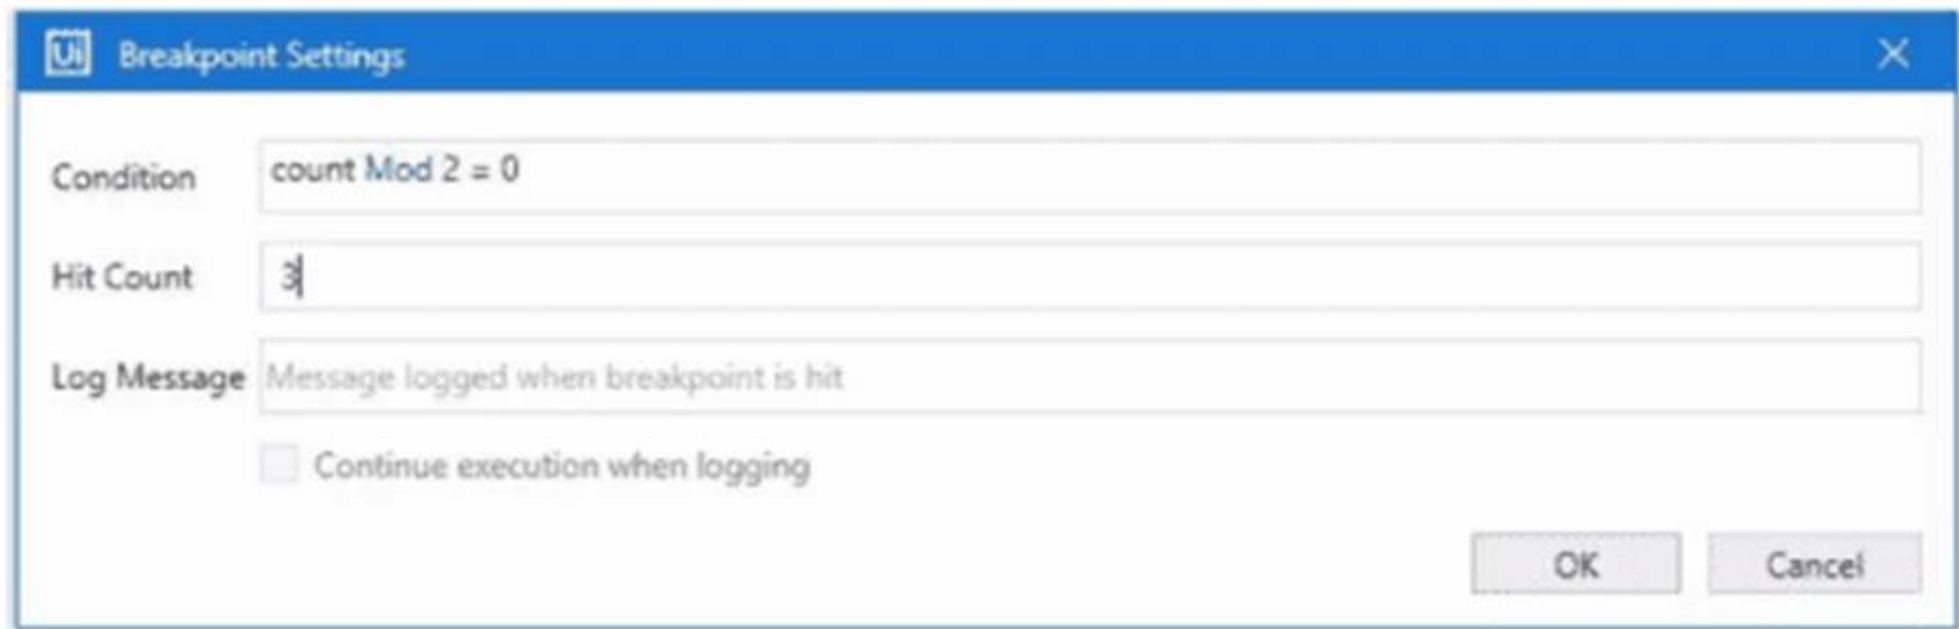

How many times will UiPath be displayed in the Output panel before the process goes into a Paused state in Debug mode?

- A. 4
- B. 3
- C. 2
- D. 5

Answer: A

NEW QUESTION 53

In which scenarios can the Add Attachment option in UiPath.WebAPI.Activities.HttpClient be enabled?

- A. Only when the Authentication protocol is set to OAuth1 or OAuth2.
- B. Only when the Request Method is set to GET or DELETE.
- C. Only when the Request Method is set to HEAD or OPTIONS.
- D. Only when the Request Method is set to POST or PUT.

Answer: D

NEW QUESTION 55

What is the purpose of the Invoke Code activity in UiPath?

- A. Invokes VB.NET or C# code, optionally passing it a list of input arguments.
- B. Invokes VB MET or Java code optionally passing it a list of input arguments
- C. Invokes VB MET code optionally passing it a list of input arguments
- D. Invokes Java code, optionally passing it a list of input arguments.

Answer: A

NEW QUESTION 57

What advantages do pre-built connectors in UiPath Integration Service offer?

- A. Replacing all types of authorization and authentication protocols with a single, standardized method.
- B. Reducing the need for UI and API automation, allowing developers to work exclusively with connectors.
- C. Simplified integration with popular applications, faster deployment, and integration across all UiPath Platform product solutions.
- D. Providing a fully customizable catalog of connectors for developing proprietary applications.

Answer: C

NEW QUESTION 62

When should a developer log a coherent message with the Logging Level set as "Info" while building an automation project?

- A. Every time data is read from external sources.
- B. Every time an exception is caught in a Catch block
- C. Every time a variable or argument value is used.
- D. Every time the robot encounters an error processing a Queue Item.

Answer: A

NEW QUESTION 64

How do you subtract a specific TimeSpan from "Today" in VB.NET?

- A. DateTime.SubtractSpanFrom(Today, TimeSpan)
- B. DateTime.Now - TimeSpan
- C. Today.SubtractUsingDate(-TimeSpan)
- D. Today.Subtract(TimeSpan)

Answer: D

NEW QUESTION 68

DRAG DROP

What is the correct sequence of steps in a REFramework project that is linked to Orchestrator if an application exception occurs on a Queue Item in the Process Transaction state?

Instructions: Drag the Description found on the "Left" and drop on the correct Step Sequence found on the Right".

<u>Description</u>	<u>Step Sequence</u>
Execute the Initialization State	Step 1: <input style="width: 100%; height: 20px;" type="text"/>
Set Transaction Status to "Failed" and take a screenshot	Step 2: <input style="width: 100%; height: 20px;" type="text"/>
Process another Queue Item, if one exists	Step 3: <input style="width: 100%; height: 20px;" type="text"/>
Close All Applications or Kill Applications	Step 4: <input style="width: 100%; height: 20px;" type="text"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

<u>Description</u>	<u>Step Sequence</u>
Execute the Initialization State	Step 1: <div style="border: 2px dashed red; padding: 5px;">Set Transaction Status to "Failed" and take a screenshot</div>
Set Transaction Status to "Failed" and take a screenshot	Step 2: <div style="border: 2px dashed red; padding: 5px;">Close All Applications or Kill Applications</div>
Process another Queue Item, if one exists	Step 3: <div style="border: 2px dashed red; padding: 5px;">Execute the Initialization State</div>
Close All Applications or Kill Applications	Step 4: <div style="border: 2px dashed red; padding: 5px;">Process another Queue Item, if one exists</div>

NEW QUESTION 73

A developer intends to enter text into an input field using a combination of a string and a hotkey. The input action should take place within a hidden or minimized window.

Which input method(s) can be used individually for the Type Into activity?

- A. Window Messages only.
- B. Simulate only.
- C. Same as App/Browser and Simulate.
- D. Simulate and Window Messages.

Answer: D

NEW QUESTION 76

A sales department is using UiPath attended automation to handle incoming sales requests through multiple forms and applications. They want to ensure the automation runs in parallel with other tasks.



What feature of trigger-based attended automation will best support this?

- A. Triggers that only run sequentially, ensuring that workflows never overlap with one another.
- B. Triggers based on application events but limited to one automation process at a time.
- C. Triggers that can run workflows intermittently, either one time, in sequence, or simultaneously.
- D. Triggers that monitor user input but cannot handle multiple workflows at the same time.

Answer: C

NEW QUESTION 79

A developer wants to add items to a list of strings using the Invoke Method activity. The list is declared as follows:

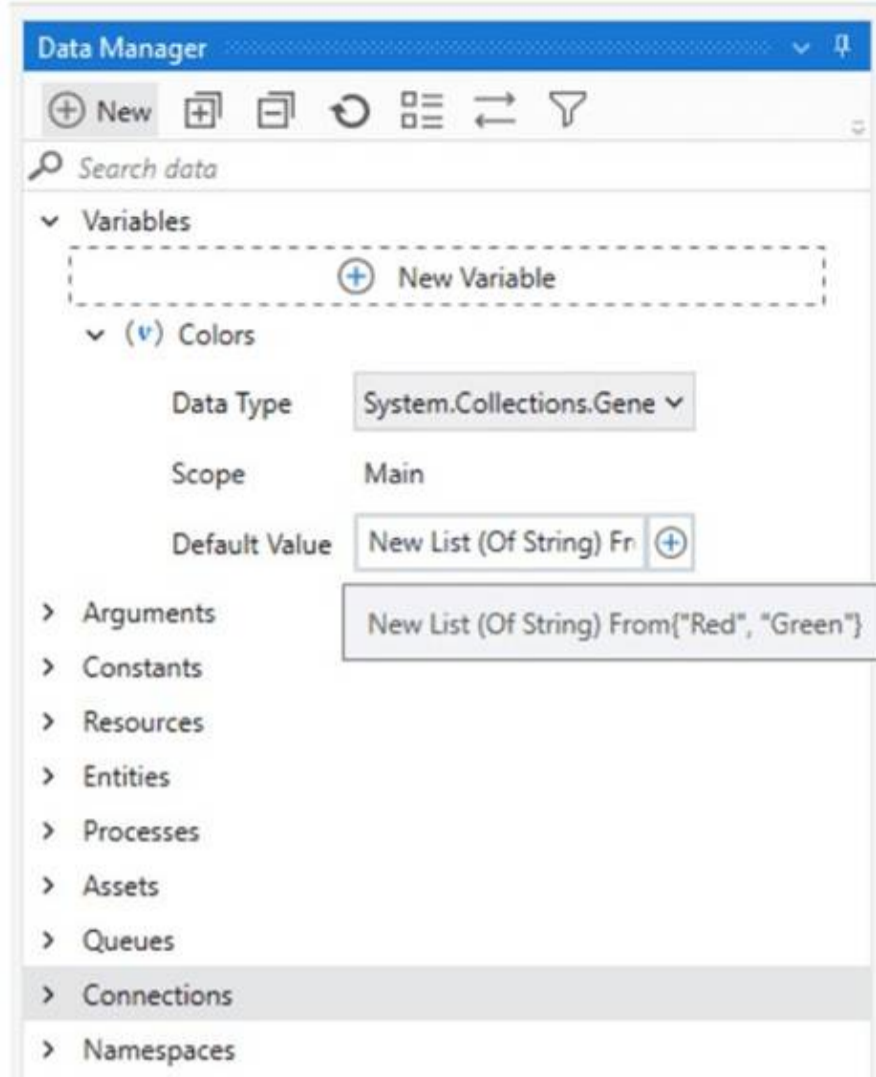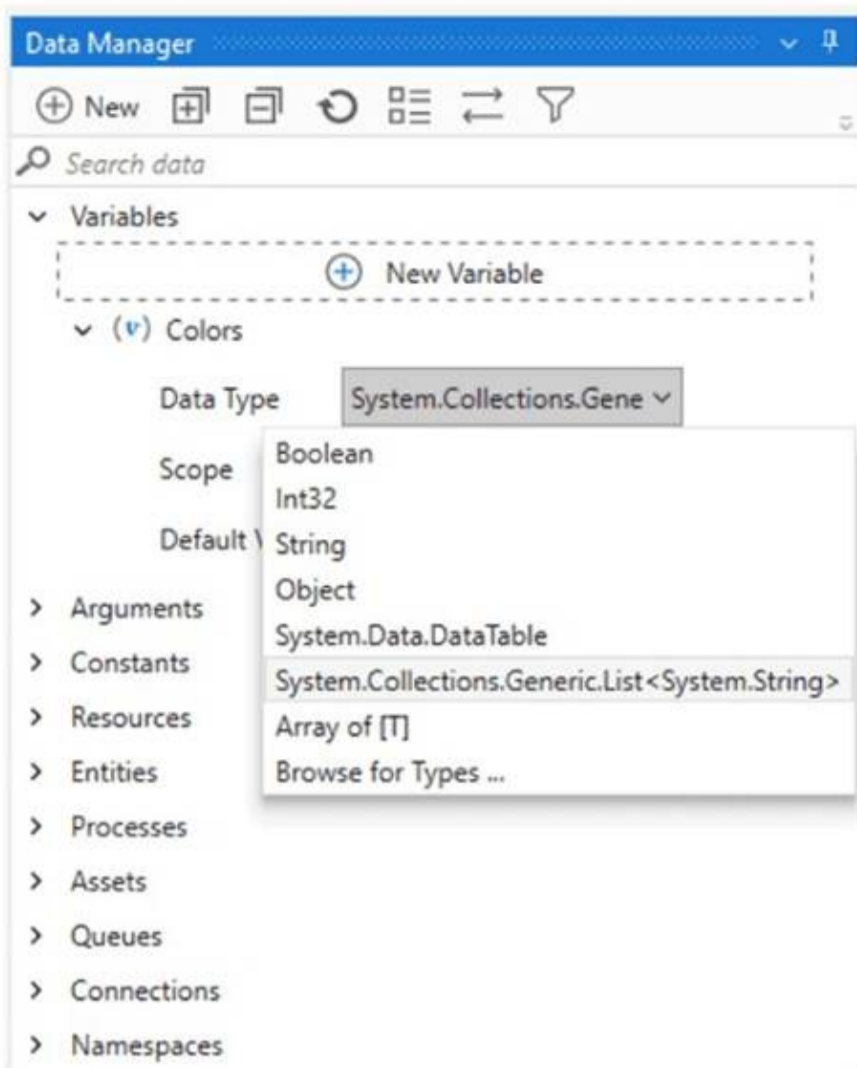

The Invoke Method includes the following properties:

System.Activities.Statements.InvokeMethod	
Common	
DisplayName	Invoke Method
Misc	
GenericTypeArguments	(Collection) ...
MethodName	Add
Parameters	(Collection) ...
Private	<input type="checkbox"/>
Result	Enter a VB expression ...
RunAsynchronously	<input type="checkbox"/>
TargetObject	Colors ...
TargetType	(null) ▼

The Invoke Method includes the following properties:



Based on the exhibits, what is the outcome of this Invoke Method activity?

- A. Colors will contain items in the following order: "Yellow", "Red", "Green".
- B. Colors will contain items in the following order: "Red", "Green".
- C. Invoke Method activity will throw an error.
- D. Colors will contain items in the following order: "Red", "Green", "Yellow".

Answer: D

NEW QUESTION 84

A developer is building a process that types data into input fields using the Hardware Events input method. Which property of the Type Into activity should be modified to reduce the pace at which the input string characters are typed into the fields?

- A. Delay before
- B. Delay between keys
- C. Delay after
- D. Alter disabled element

Answer: B

NEW QUESTION 89

A project built using REFramework pulls phone numbers from a database of employees and creates queue items for each one. Following processing, these elements must be added to a financing application. The queue item holding a phone number becomes invalid if a digit is accidentally left out because of a human mistake. As a requirement, queue items that contain partial numbers should not be accepted.

What type of error should be thrown according to best practices?

- A. Business Exception
- B. Application Exception
- C. Fatal Exception
- D. System Exception

Answer: A

NEW QUESTION 94


A developer wants to create an automation in which the input from the user and pre- defined conditions determine the transition between stages. In UiPath Studio, which is the recommended type of workflow that meets the requirement?

- A. Flowchart
- B. Workflow
- C. State Machine
- D. Global Exception Handler

Answer: A

NEW QUESTION 98

Based on the following exhibit, which output is displayed in the Output panel if Step Out is clicked on the Debug ribbon tab of UiPath Studio?

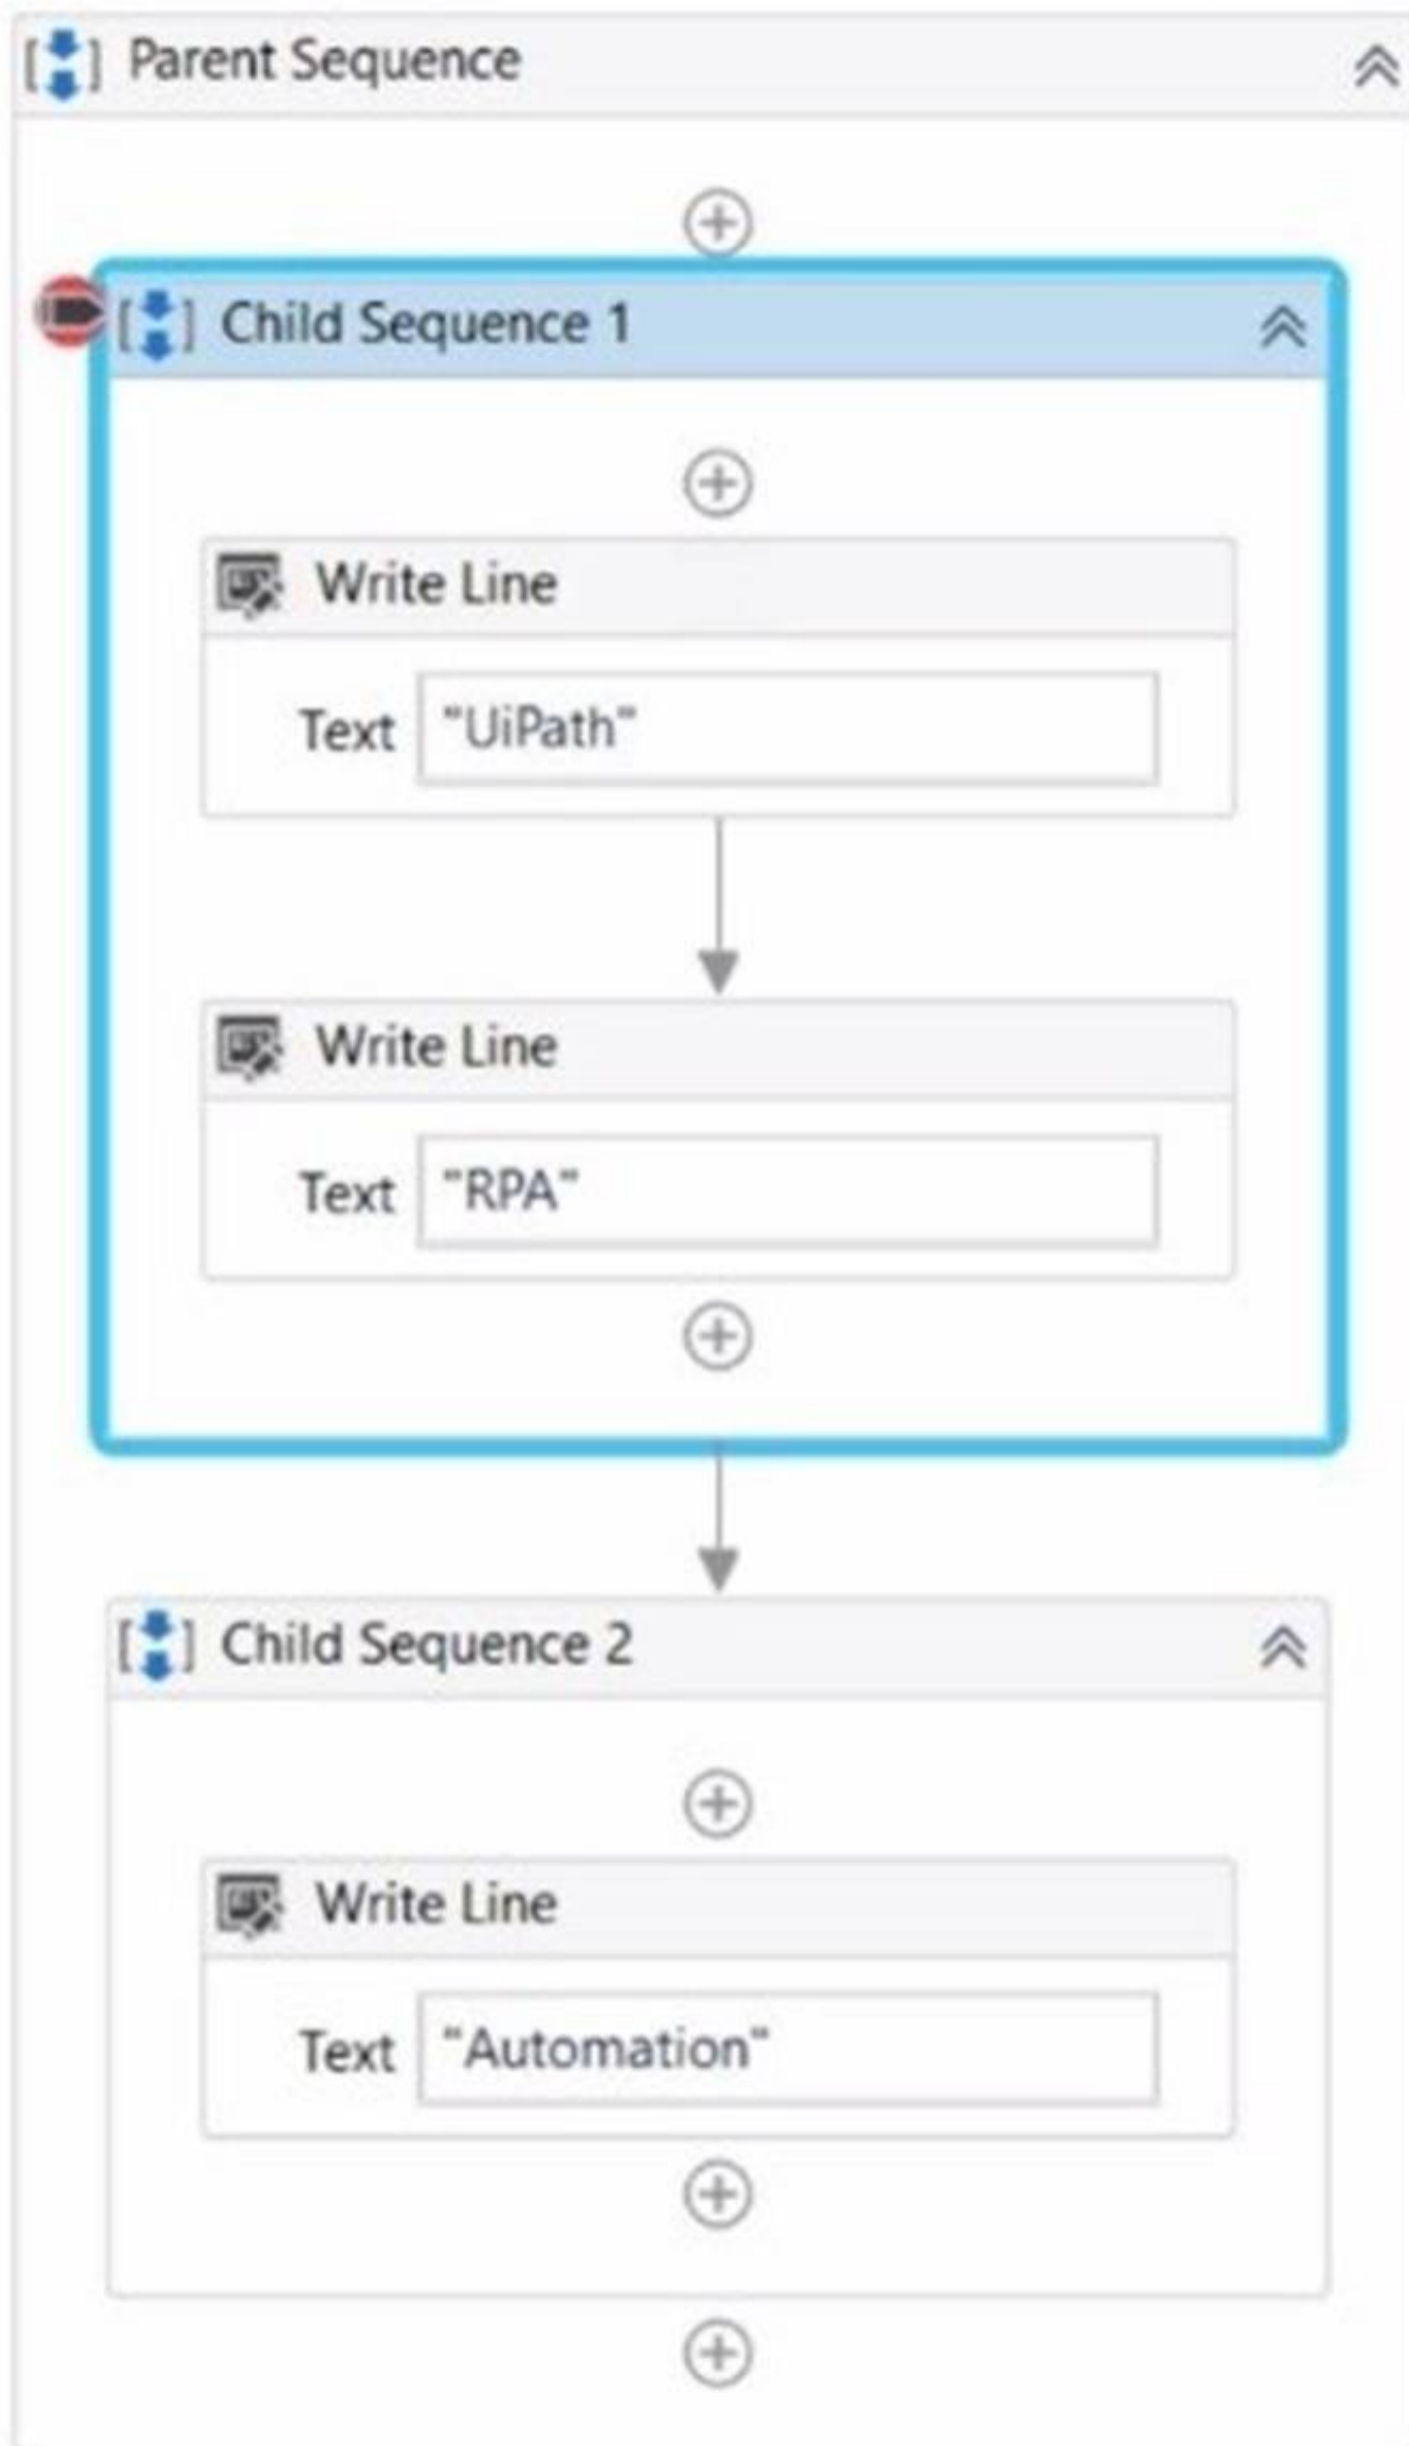

- A. UiPath RPAAutomation
- B. Automation
- C. Automation RPAUiPath RPA
- D. UiPath RPA

Answer: A

NEW QUESTION 102

Where in the REFramework template project is the "SetTransactionStatus.xaml" invoked?

- A. In the Finally section of the Try Catch activity in the End Process state.
- B. In the Try section of the Try Catch activity in the End Process state.
- C. In the Try and Catches sections of the Try Catch activity in the Process Transaction state.
- D. In the Try section of the Try Catch activity in the Process Transaction state.

Answer: C

NEW QUESTION 107

Which of the following statements is true about the existing UiPath Studio installation packages?

- A. The Attended Robot installation package installs only the UiPath Robot.
- B. The Unattended Robot installation package installs only UiPath Studio, Assistant, and Robot.
- C. The Attended Robot installation package installs only UiPath Studio, and Robot.
- D. The Automation Developer installation package installs only UiPath Studio, Assistant, and Robot.

Answer: A

NEW QUESTION 111

Which of the following is a tag in a selector?

- A. id='selMonth'
- B. aaname='FirstName'
- C. <html app-msedge.exe' title-Find Unicorn Name' />
- D. class-down-chevron set-font'

Answer: C

Explanation:

A tag in a selector is a node that represents a UI element or a container of UI elements. A tag has the following format: <ui_system attr_name_1='attr_value_1' ... attr_name_N='attr_value_N'/>. A tag can have one or more attributes that help identify the UI element uniquely and reliably¹. For example, the tag <html app-msedge.exe' title-Find Unicorn Name' /> represents the HTML document of a web page opened in Microsoft Edge browser, with the title ??Find Unicorn Name??. The attributes app-msedge.exe and title-Find Unicorn Name help distinguish this tag from other HTML documents.

The other options are not tags, but attributes. An attribute is a property of a UI element that has a name and a value. For example, id='selMonth' is an attribute that indicates the ID of a UI element is ??selMonth??. Attributes are used inside tags to specify the UI element or container¹.

References:

- 1: Studio - About Selectors - UiPath Documentation Portal

NEW QUESTION 113

How are custom log fields used in the REFramework?

- A. Customlog fieldsareusedto automatically retry failed transactions with real-time updates.
- B. Customlog fieldsareusedto store sensitive information like credentials and personal data of users.
- C. Customlog fieldsareusedto define the variable types for transactions, replacing the default Queueitemtype.
- D. Customlog fieldsareincluded in log messages and used to add more data about each transaction for reporting and troubleshooting purposes.

Answer: D

NEW QUESTION 114

Which command in the UiPath installation folder configures the UIPath.RemoteDebugging.Agent utility on a Windows robot to accept remote debugging requests from Studio?

- A. UiPath.RemoteDebuggingq.Aqent.exe start -port -password -verbose
- B. UiPath-RemoteDebuggingq.Aqent.exe enable -port -password -verbose
- C. UiPath.RemoteDebuggingq.Aqent.exe enable -port -username -password -verbose
- D. dotnet ./UiPath.RemoteDebuggingq.Aqent.dll enable -port -password -verbose

Answer: B

NEW QUESTION 117

In the context of the REFramework, if the OrchestratorQueueName key is present in both the Settings and Assets sheets, but an asset with the corresponding name is not present in Orchestrator, what will be the behavior at run time?

- A. An empty string will be saved for the "OrchestratorQueueName" key in the config dictionary.
- B. The flow will throw an exception in InitAllSettings workflow.
- C. The "OrchestratorQueueName" key is not added to the config dictionary and the flow will throw in Get Transaction Data workflow.
- D. The flow will use the value from the Settings sheets since the asset is missing.

Answer: B

NEW QUESTION 121

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your UiPath-ADPv1 Exam with Our Prep Materials Via below:

<https://www.certleader.com/UiPath-ADPv1-dumps.html>