

# Fortinet

## Exam Questions FCP\_FML\_AD-7.4

FCP - FortiMail 7.4 Administrator



**NEW QUESTION 1**

Which license must you apply to a FortiMail device to enable the HA centralized monitoring features?

- A. Cloud gateway license
- B. Advanced Management and MSSP license
- C. Office 365 protection license
- D. Enterprise license

**Answer: B**

**NEW QUESTION 2**

Refer to the exhibit, which displays the domain configuration of a FortiMail device running in transparent mode.



The screenshot shows the domain configuration interface for a FortiMail device. The configuration includes:

- Domain name:** example.com
- Is subdomain:**
- Main domain:** (empty dropdown)
- Relay type:** Host
- SMTP server:** 172.16.32.56, Port: 25
- Use SMTPS:**
- Fallback SMTP server:** (empty), Port: 25
- Use SMTPS:**
- Relay Authentication:**
- Recipient Address Verification:**
- Transparent Mode Options:**
  - This server is on:** port2
  - Hide the transparent box:**
  - Use this domain's SMTP server to deliver the mail:**

Based on the exhibit, which two sessions are considered incoming sessions? (Choose two.)

- A. DESTINATIONIP:192.163.54.10 MAIL FROM: accour.t3@exaraple.com RCPT TO:saleseexamplc.com
- B. BDESTINATION IP:10.25.32.15 MAIL FROM: trainir.g@example.com RCPT TO:students@external.com
- C. DESTINATIONIP:172.16.32.56 MAIL FROM: misfihosted.net RCPT TO:noc9example.com
- D. DESTINATION IP:172.16.32.56 MAIL FROM: support@example.com RCPT TO:marketingexampla.com

**Answer: AB**

**NEW QUESTION 3**

A FortiMail administrator is investigating a sudden increase in DSNs being delivered to their protected domain. After searching the logs, the administrator identifies that the DSNs were not generated because of any outbound email sent from their organization. Which FortiMail antispam technique can the administrator enable to prevent this scenario?

- A. Spoofed header detection
- B. Spam outbreak protection.
- C. FortiGuard IP Reputation
- D. Bounce address tag validation

**Answer: D**

**NEW QUESTION 4**

Which two factors are required for an active-active HA configuration of FortiMail in server mode? (Choose two.)

- A. Devices must be deployed behind a load balancer.
- B. Service monitoring must be configured for remote SMTP
- C. A primary must be designated to initially process email.
- D. Mail data must be stored on a NAS server.

**Answer: AD**

**NEW QUESTION 5**


In which two places can the maximum email size be overridden on FortiMail? (Choose two.)

- A. IP Policy configuration
- B. Protected Domain configuration
- C. Resource Profile configuration
- D. Session Profile configuration

**Answer: BC**

**NEW QUESTION 6**

Refer to the exhibit, which shows a topology diagram of two MTAs.

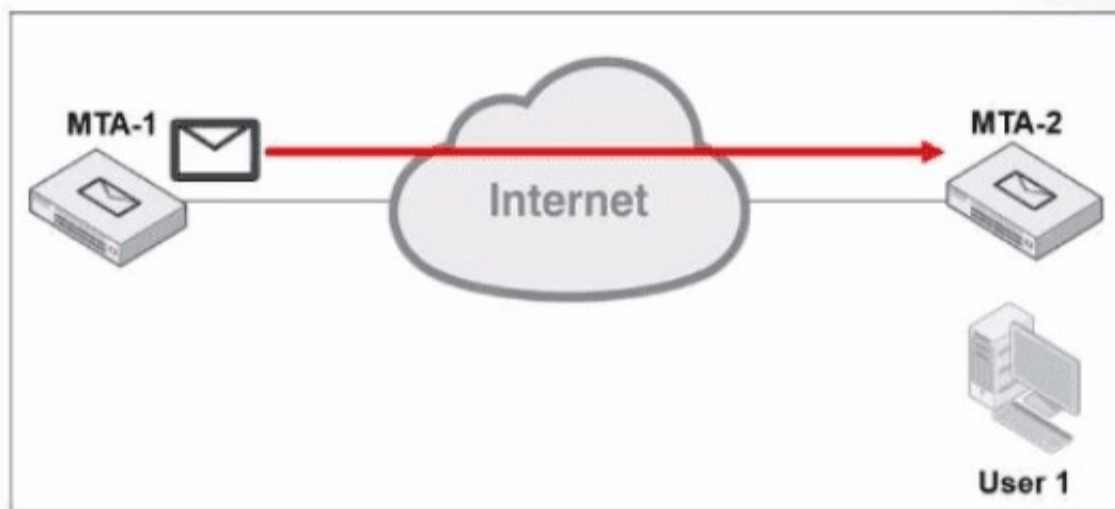

MTA-1 is delivering an email intended for User 1 to MTA-2. User 1 uses Outlook as an email client. Which two statements about protocol usage between these devices are correct? (Choose two.)

- A. User 1 will use IMAP or POP3 to download the email message from MTA-2.
- B. MTA-2 will use IMAP to download the email message from MTA-1.
- C. MTA-1 will use SMTP to deliver the email message to MTA-2.
- D. MTA-1 will use POP3 to deliver the email message to User 1 directly.

**Answer: AC**

**NEW QUESTION 7**

Refer to the exhibit, which shows the Authentication Reputation list on a FortiMail device running in gateway mode.

Sender Reputation		Authentication Reputation		
<input type="button" value="Delete"/> <input type="button" value="Add to Exempt List"/> <input type="button" value="View Blocked History"/>				
<input type="button" value="Refresh"/> <input type="button" value="Previous"/> <input type="text" value="1"/> / <input type="text" value="1"/> <input type="button" value="Next"/> <input type="button" value="Last"/> Records per page: <input type="text" value="50"/>				
IP	Location	Violation	Access	Expiry Time
10.0.1.254	ZZ (Reserved)	Mail	CLI, Mail, Web	5 minutes

Why was the IP address blocked?

- A. The IP address had consecutive SMTPS login failures to FortiMail..
- B. The IP address had consecutive IMAP login failures to FortiMail.
- C. The IP address had consecutive administrative password failures to FortiMail.
- D. The IP address had consecutive SSH login failures to FortiMail.

**Answer: A**

**NEW QUESTION 8**

While testing outbound MTA functionality, an administrator discovers that all outbound email is being processed using policy ID I: 2:0: SYSTEM. What are two possible reasons why the third policy ID value is o? (Choose two.)

- A. IP policy ID 2 has the exclusive flag set.
- B. There are no outgoing recipient policies configured.
- C. Outbound email is being rejected.
- D. There are no access delivery rules configured for outbound email.

**Answer:** AB

**NEW QUESTION 9**

A mail user wants the ability to subscribe or publish to and from their FortiMail calendar using Thunderbird as their mail user agent (MUA). What information does this mail user need from their webmail User Preferences section?

- A. Free busy URL
- B. Service URLs
- C. Secondary account configurations
- D. Message tags

**Answer:** C

**NEW QUESTION 10**

Refer to the exhibit.



FortiSandbox Inspection	<input checked="" type="checkbox"/> Statistics...
FortiSandbox type	Appliance <b>Cloud</b> Enhanced Cloud
Region	Global ▾
	Test Connection
Notification email	user1@example.com
Statistics interval	5 (minutes)
Scan timeout	30 (minutes)
Scan result expires in	60 (minutes)


What does the Scan timeout value configure?

- A. How long FortiMail will wait for a scan result from FortiSandbox
- B. How often the local scan results cache will expire on FortiMail
- C. How often FortiMail will query FortiSandbox for a scan result
- D. How long FortiMail will wait to send a file or URI to FortiSandbox

**Answer:** A

**NEW QUESTION 10**

Refer to the exhibit, which displays the Mail Settings page of a FortiMail device running in gateway mode.

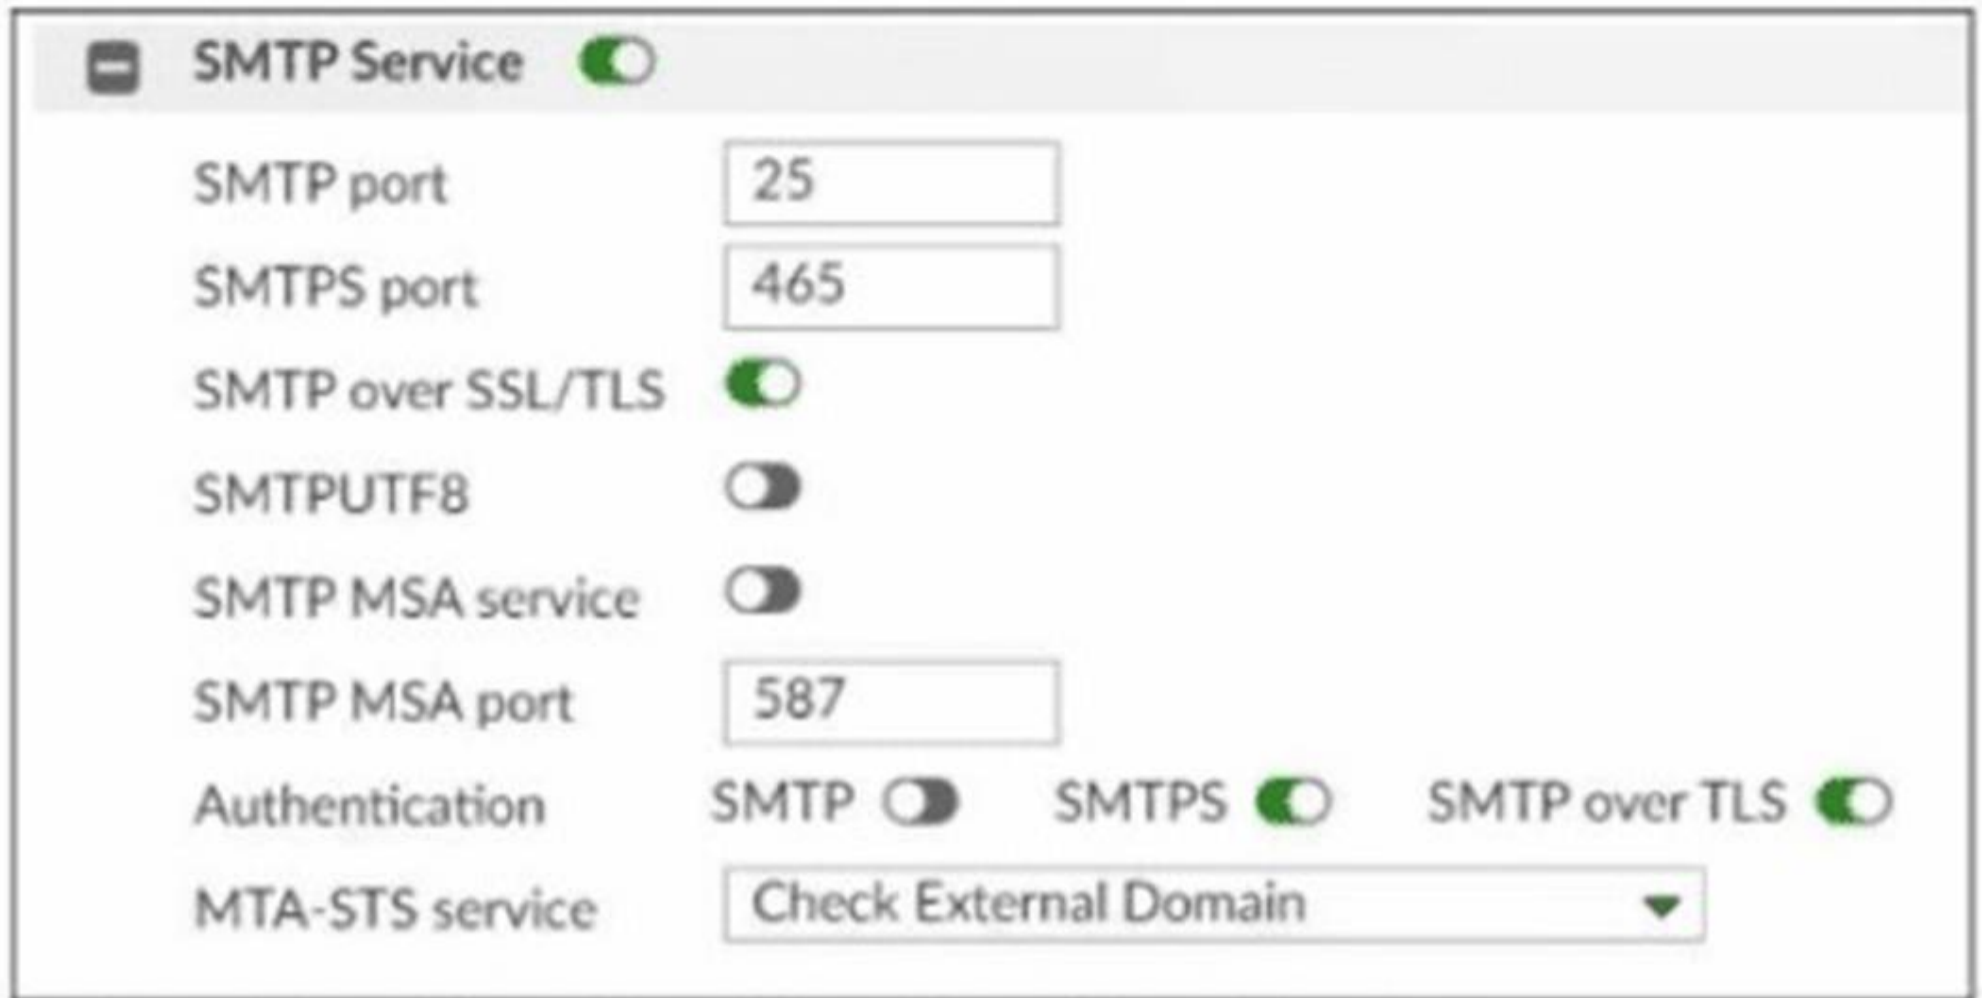

In addition to selecting Check External Domain in the MTA-STS service field, what else must an administrator do to enable MTA-STS?

- A. Enable MTA-STS in the associated TLS profile.
- B. Enable SMTPUTF8 support in the mail server settings.
- C. Enable secure authentication in the associated SMTP authentication profile.
- D. Enable MTA-STS action in the appropriate inbound recipient policy.

Answer: C

**NEW QUESTION 12**

Refer to the exhibit which displays a list of IBE users on a FortiMail device.

Enabled	Email	First Name	Last Name	Status	Creation Time	Last Access
<input checked="" type="checkbox"/>	extuser@external.lab	Mail	User	Activated		
<input checked="" type="checkbox"/>	extuser2@external.lab			Pre-registered		

Which statement describes the pre-registered status of the IBE user extuser2@external.lab?

- A. The user has received an IBE notification email, but has not accessed the HTTPS URL or attachment yet.
- B. The user was registered by an administrator in anticipation of IBE participation.
- C. The user account has been de-activated, and the user must register again the next time they receive an IBE email.
- D. The user has completed the IBE registration process, but has not yet accessed their IBE email.

Answer: A

**NEW QUESTION 14**

Which three configuration steps must you set to enable DKIM signing for outbound messages on FortiMail? (Choose three.)

- A. Generate a public/private key pair in the protected domain configuration.
- B. Enable the DKIM checker in a matching session profile.
- C. Publish the public key as a TXT record in a public DNS server.
- D. Enable the DKIM checker in a matching antispam profile.
- E. Enable DKIM signing for outgoing messages in a matching session profile.

Answer: ACE

**NEW QUESTION 16**

Refer to the exhibits showing SMTP limits (Session Profile — SMTP Limits), and domain settings (Domain Settings, and Domain Settings — Other) of a FortiMail device.

## Session Profile—SMTP Limits

**Session Profile**

Profile name

Comment

**SMTP Limits**

Restrict number of EHLO/HELOs per session to	<input type="text" value="3"/>
Restrict number of email per session to	<input type="text" value="10"/>
Restrict number of recipients per email to	<input type="text" value="500"/>
Cap message size (KB) at	<input type="text" value="51200"/>
Cap header size (KB) at	<input type="text" value="10240"/>
Maximum number of NOOPs allowed for each connection	<input type="text" value="10"/>
Maximum number of RSETs allowed for each connection	<input type="text" value="20"/>

## Domain Settings

### FortiMail

Domain name

Relay type

SMTP server  Port  [\[Test...\]](#)

Use SMTPS

Fallback SMTP server  Port  [\[Test...\]](#)

Use SMTPS

Relay Authentication

## Domain Settings—Other

Other

Webmail theme

Webmail language

Maximum message size (KB)

SMTP greeting (EHLO/HELO) name (as client)

IP pool  Direction

Remove received header of outgoing email

Use global bayesian database

Bypass bounce verification

Email continuity

Which message size limit in KB will the FortiMail apply to outbound email?

- A. 204300
- B. There is no message size limit for outbound email from a protected domain.
- C. 10240
- D. 51200

Answer: D

NEW QUESTION 19

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **FCP\_FML\_AD-7.4 Practice Exam Features:**

- \* FCP\_FML\_AD-7.4 Questions and Answers Updated Frequently
- \* FCP\_FML\_AD-7.4 Practice Questions Verified by Expert Senior Certified Staff
- \* FCP\_FML\_AD-7.4 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* FCP\_FML\_AD-7.4 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The FCP\\_FML\\_AD-7.4 Practice Test Here](#)**